


MARKINGS:

A1-A2-A3 0%
 B1-B2-B3 65%
 C1-C2-C3 80%
 H1-H2-H3 100%

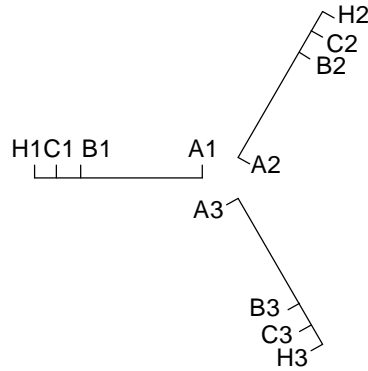

3 PHASE MOTOR STARTING
AUTO-TRANSFORMER
TYPE: ANN-SELF COOLED

CAT.NO.: RS10J
 HP: 10
 VOLTAGE SYSTEM: 600 V
 TAPS: 0, 65%, 80%, 100%
DUTY:
 ON: 15 Seconds
 OFF: 3 Minutes 45 Seconds
 REPEAT: 15 Cycles - For automatically operated starter
 4 Cycles - For Manually operated starter
 REST: 2 Hours
 ON: 15 Seconds
 OFF: 3 Minutes 45 Seconds
 REPEAT: 15 Cycles - For automatically operated starter
 4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS			MOUNTING	
10.00	4.50	9.25	7.50	4.0


INSULATION CLASS: 220° C
 FREQUENCY: 60 Hz.
 COILS: COPPER
 WEIGHT: 21 Lbs

TERMINATION: COPPER PADS

STANDARDS:
 -CSA CERTIFIED
 -UL LISTED

SPECIAL FEATURE:
 -NC 200°C THERMOSTAT ON CENTRE COIL

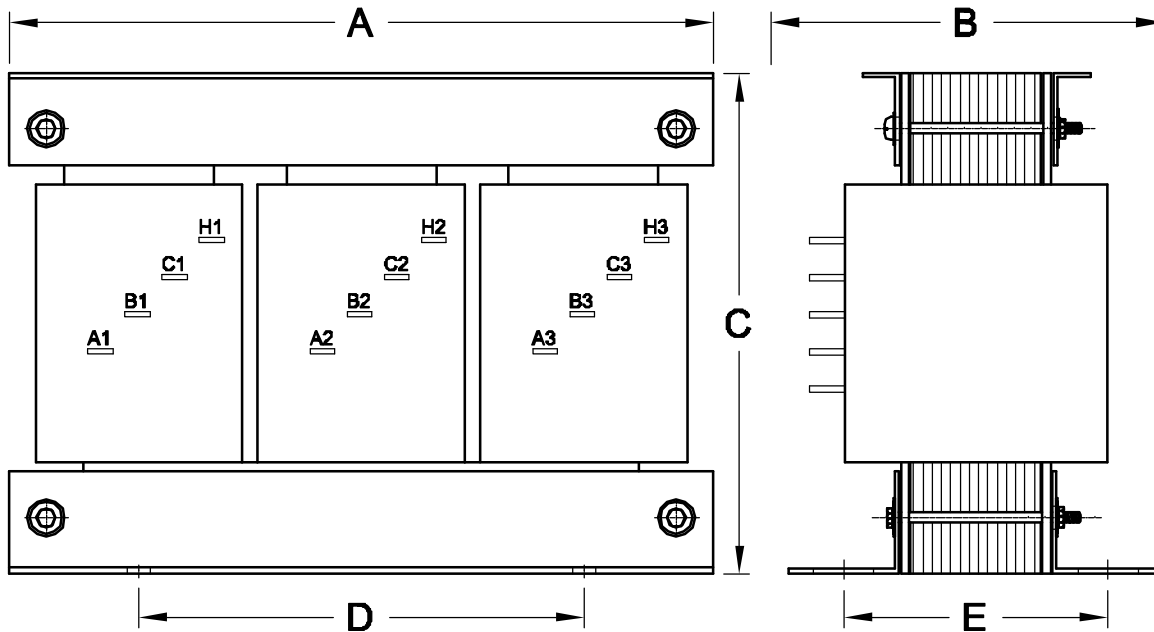

REV.	REMARKS	BY:	DATE:
 REX MANUFACTURING DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUGUST 12, 2004	REV.: 0	
CHECKED BY: V.S.	DATE: AUGUST 12, 2004	SWO#: N/A	
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE			
3 PHASE, 10 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		