


MARKINGS:

A1-A2-A3 0%
 B1-B2-B3 50%
 C1-C2-C3 65%
 D1-D2-D3 80%
 H1-H2-H3 100%

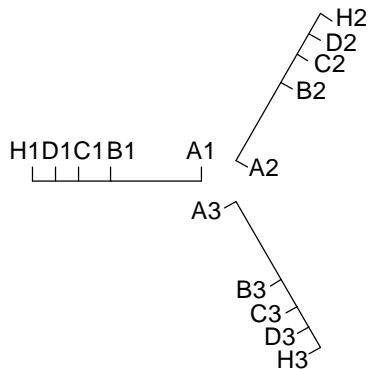

**3 PHASE MOTOR STARTING
 AUTO-TRANSFORMER
 TYPE: ANN-SELF COOLED**


CAT.NO.: RS125J
 HP: 125
 VOLTAGE SYSTEM: 600 V
 TAPS: 0, 50%, 65%, 80%, 100%
DUTY:
 ON: 15 Seconds
 OFF: 3 Minutes 45 Seconds
 REPEAT: 15 Cycles - For automatically operated starter
 4 Cycles - For Manually operated starter
 REST: 2 Hours
 ON: 15 Seconds
 OFF: 3 Minutes 45 Seconds
 REPEAT: 15 Cycles - For automatically operated starter
 4 Cycles - For Manually operated starter

A	B	C	D	E
DIMENSIONS		MOUNTING		
16.00	7.75	12.75	13.00	6.25

INSULATION CLASS: 220° C
 FREQUENCY: 60 Hz.
 COILS: COPPER
 WEIGHT: 150 Lbs
 TERMINATION: COPPER PADS

STANDARDS:
 -CSA CERTIFIED
 -UL LISTED

SPECIAL FEATURE:
 -NC 200°C THERMOSTAT ON CENTRE COIL

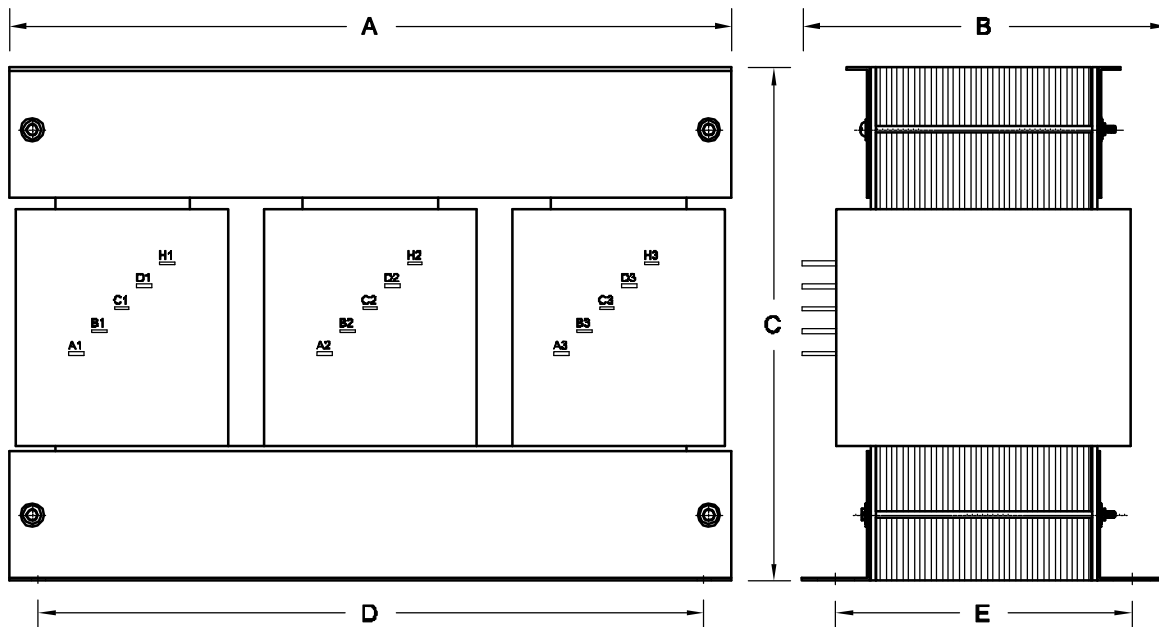

REV.	REMARKS	BY:	DATE:
REX MANUFACTURING DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY:	SARKIS	DATE:	AUG. 12, 2004
CHECKED BY:	V.S.	DATE:	AUG. 12, 2004
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE			
3 PHASE, 125 HP, 600 V			
SCALE:	N.T.S.	DRAWING No.:	