


MARKINGS:

A1-A2-A3      0%  
 B1-B2-B3      50%  
 C1-C2-C3      65%  
 D1-D2-D3      80%  
 H1-H2-H3      100%

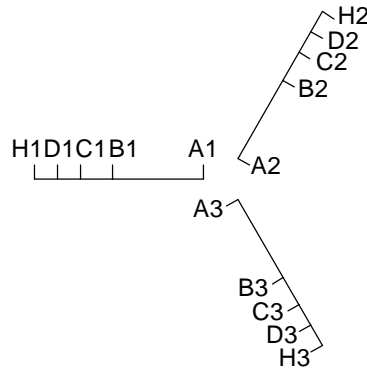

3 PHASE MOTOR STARTING  
AUTO-TRANSFORMER  
TYPE: ANN-SELF COOLED

CAT.NO.:                      RS150J  
 HP:                              150  
 VOLTAGE SYSTEM:          600 V  
 TAPS:                            0, 50%, 65%, 80%, 100%  
DUTY:  
 ON:                              15 Seconds  
 OFF:                             3 Minutes 45 Seconds  
 REPEAT:                      15 Cycles - For automatically operated starter  
    4 Cycles - For Manually operated starter  
 REST:                            2 Hours  
 ON:                              15 Seconds  
 OFF:                             3 Minutes 45 Seconds  
 REPEAT:                      15 Cycles - For automatically operated starter  
    4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS		MOUNTING		
16.00	8.25	12.75	13.00	6.25


INSULATION CLASS:      220° C  
 FREQUENCY:              60 Hz.  
 COILS:                      COPPER  
 WEIGHT:                    170 Lbs

TERMINATION:            COPPER PADS

STANDARDS:  
 -CSA CERTIFIED  
 -UL LISTED

SPECIAL FEATURE:  
 -NC 200°C THERMOSTAT ON CENTRE COIL

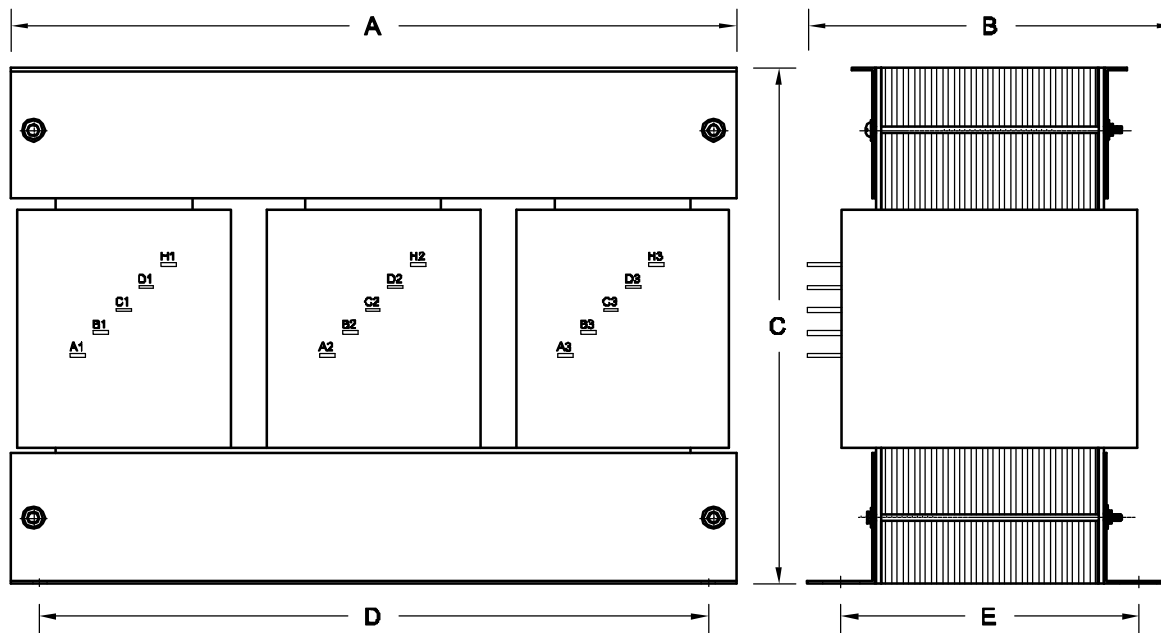

REV.	REMARKS	BY:	DATE:
 <b>REX MANUFACTURING</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY:	SARKIS	DATE:	AUG. 12, 2004
CHECKED BY:	V.S.	DATE:	AUG. 12, 2004
TITLE:      MOTOR STARTING AUTO-TRANSFORMER OUTLINE			
3 PHASE, 150 HP, 600 V			
SCALE:	N.T.S.	DRAWING No.:	