


**MARKINGS:**


A1-A2-A3	0%
B1-B2-B3	65%
C1-C2-C3	80%
H1-H2-H3	100%

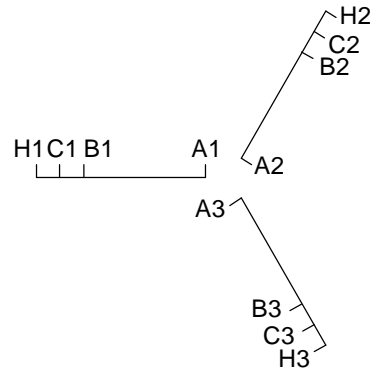

**3 PHASE MOTOR STARTING  
AUTO-TRANSFORMER  
TYPE: ANN-SELF COOLED**

CAT.NO.:	RS15J
HP:	15
VOLTAGE SYSTEM:	600 V
TAPS:	0, 65%, 80%, 100%
<b>DUTY:</b>	
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter
REST:	2 Hours
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter

A	B	C	D	E
DIMENSIONS			MOUNTING	
10.00	5.00	9.25	7.50	4.50

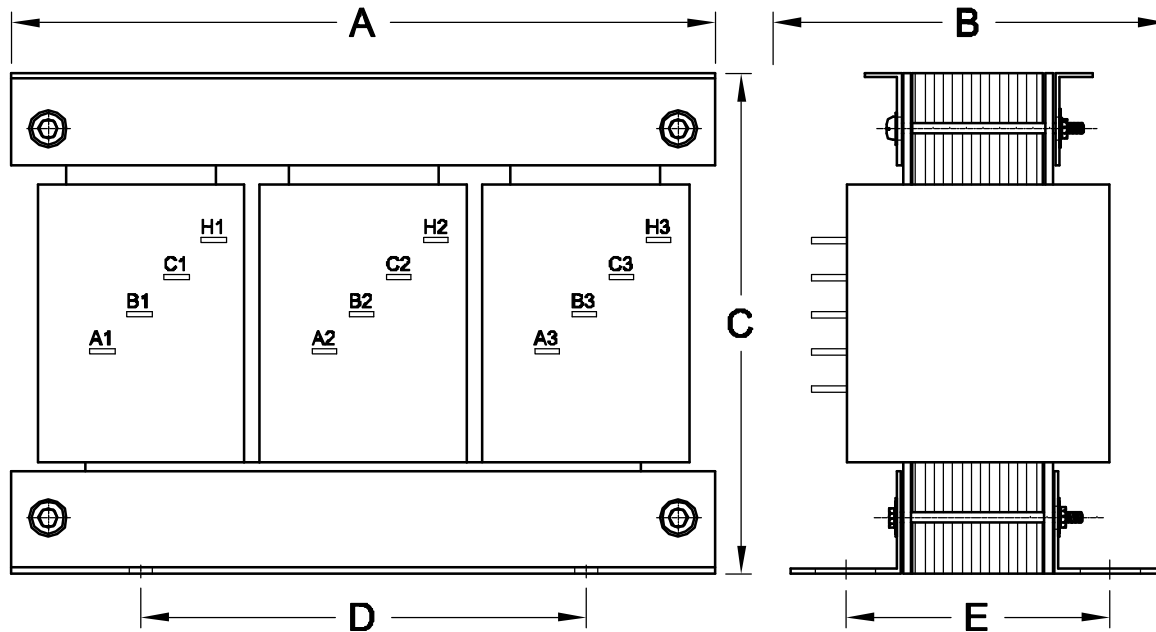

INSULATION CLASS:	220° C
FREQUENCY:	60 Hz.
COILS:	COPPER
WEIGHT:	31 Lbs

TERMINATION: COPPER PADS

**STANDARDS:**  
-CSA CERTIFIED  
-UL LISTED

**SPECIAL FEATURE:**  
-NC 200°C THERMOSTAT ON CENTRE COIL

REV.	REMARKS	BY:	DATE:
<b>REX MANUFACTURING</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUGUST 12, 2004	REV.: 0	
CHECKED BY: V.S.	DATE: AUGUST 12, 2004	SWO#: N/A	
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE 3 PHASE, 15 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		