


**MARKINGS:**

A1-A2-A3      0%  
 B1-B2-B3      65%  
 C1-C2-C3      80%  
 H1-H2-H3      100%

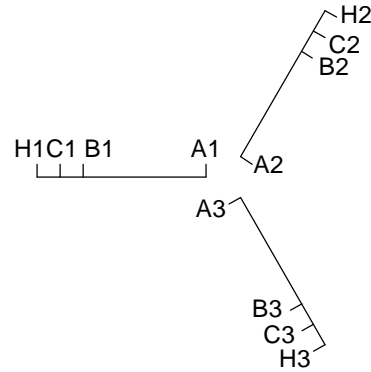

**3 PHASE MOTOR STARTING  
 AUTO-TRANSFORMER  
 TYPE: ANN-SELF COOLED**

CAT.NO.: RS20J  
 HP: 20  
 VOLTAGE SYSTEM: 600 V  
 TAPS: 0, 65%, 80%, 100%  
**DUTY:**  
 ON: 15 Seconds  
 OFF: 3 Minutes 45 Seconds  
 REPEAT: 15 Cycles - For automatically operated starter  
 4 Cycles - For Manually operated starter  
 REST: 2 Hours  
 ON: 15 Seconds  
 OFF: 3 Minutes 45 Seconds  
 REPEAT: 15 Cycles - For automatically operated starter  
 4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS			MOUNTING	
10.00	6.00	9.25	7.50	4.50

INSULATION CLASS: 220° C  
 FREQUENCY: 60 Hz.  
 COILS: COPPER  
 WEIGHT: 37 Lbs

TERMINATION: COPPER PADS

**STANDARDS:**  
 -CSA CERTIFIED  
 -UL LISTED

**SPECIAL FEATURE:**  
 -NC 200°C THERMOSTAT ON CENTRE COIL

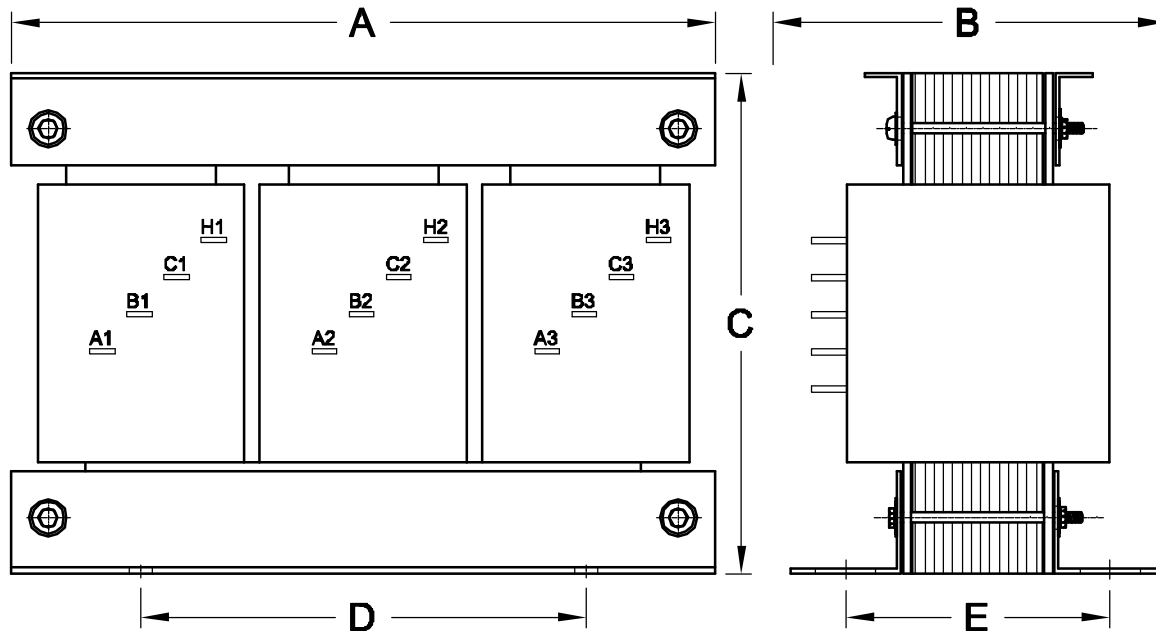

REV.	REMARKS	BY:	DATE:
<b>REX MANUFACTURING</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUGUST 12, 2004	REV.: 0	
CHECKED BY: V.S.	DATE: AUGUST 12, 2004	SWO#: N/A	
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE 3 PHASE, 20 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		