


MARKINGS:


A1-A2-A3	0%
B1-B2-B3	65%
C1-C2-C3	80%
H1-H2-H3	100%

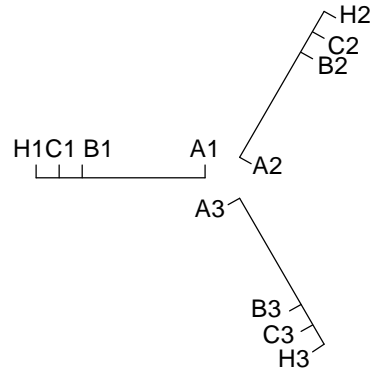

**3 PHASE MOTOR STARTING
AUTO-TRANSFORMER
TYPE: ANN-SELF COOLED**

CAT.NO.:	RS50J
HP:	50
VOLTAGE SYSTEM:	600 V
TAPS:	0, 65%, 80%, 100%
DUTY:	
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter
REST:	2 Hours
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter

A	B	C	D	E
DIMENSIONS			MOUNTING	
12.00	6.00	11.00	8.00	3.75

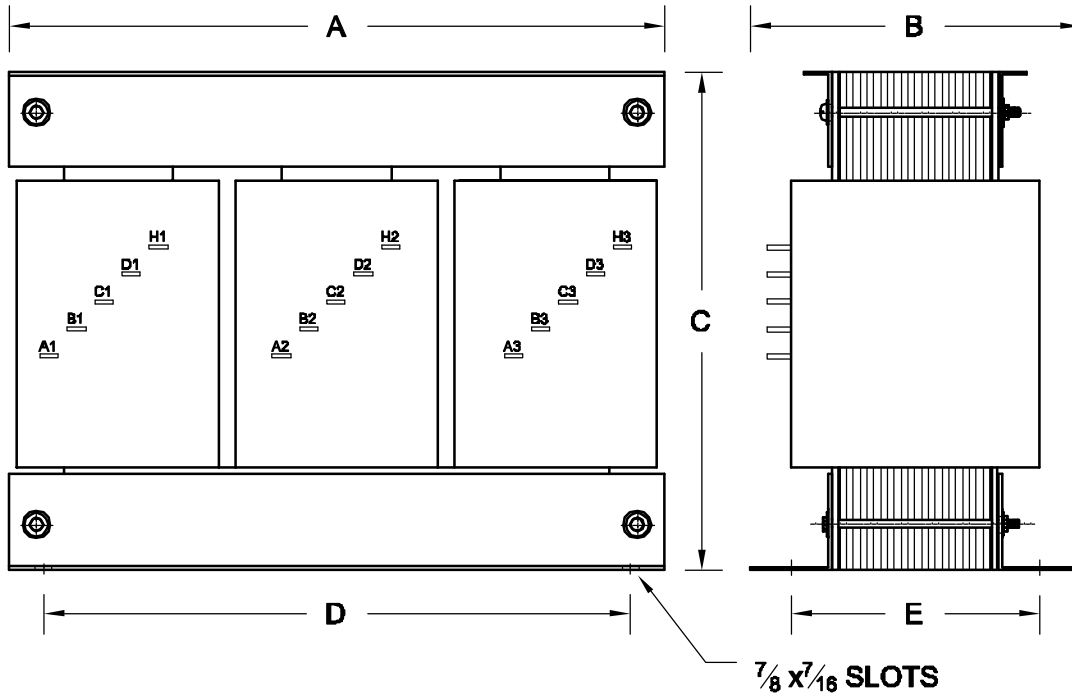

INSULATION CLASS:	220° C
FREQUENCY:	60 Hz.
COILS:	COPPER
WEIGHT:	80 Lbs
TERMINATION:	COPPER PADS
STANDARDS:	
-CSA CERTIFIED	
-UL LISTED	
SPECIAL FEATURE:	
-NC 200°C THERMOSTAT ON CENTRE COIL	

REV.	REMARKS	BY:	DATE:
REX MANUFACTURING DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUG. 5, 2004	REV.: 0	
CHECKED BY: V.S.	DATE: AUG. 5, 2004	SWO#: N/A	
TITLE: MOTOR STARTING AUTO-THRANSFORMER OUTLINE			
3 PHASE, 50 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		