


MARKINGS:

A1-A2-A3	0%
B1-B2-B3	50%
C1-C2-C3	65%
D1-D2-D3	80%
H1-H2-H3	100%

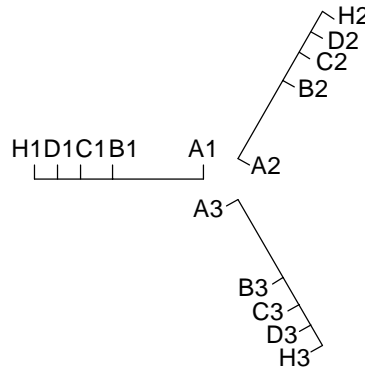

**3 PHASE MOTOR STARTING
AUTO-TRANSFORMER
TYPE: ANN-SELF COOLED**

CAT.NO.:	RS60J
HP:	60
VOLTAGE SYSTEM:	600 V
TAPS:	0, 50%, 65%, 80%, 100%
DUTY:	
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter
REST:	2 Hours
ON:	15 Seconds
OFF:	3 Minutes 45 Seconds
REPEAT:	15 Cycles - For automatically operated starter 4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS			MOUNTING	
12.00	7.00	10.00	8.00	4.00

INSULATION CLASS:	220° C
FREQUENCY:	60 Hz.
COILS:	COPPER
WEIGHT:	85 Lbs

TERMINATION: COPPER PADS

STANDARDS:
-CSA CERTIFIED
-UL LISTED

SPECIAL FEATURE:
-NC 200°C THERMOSTAT ON CENTRE COIL

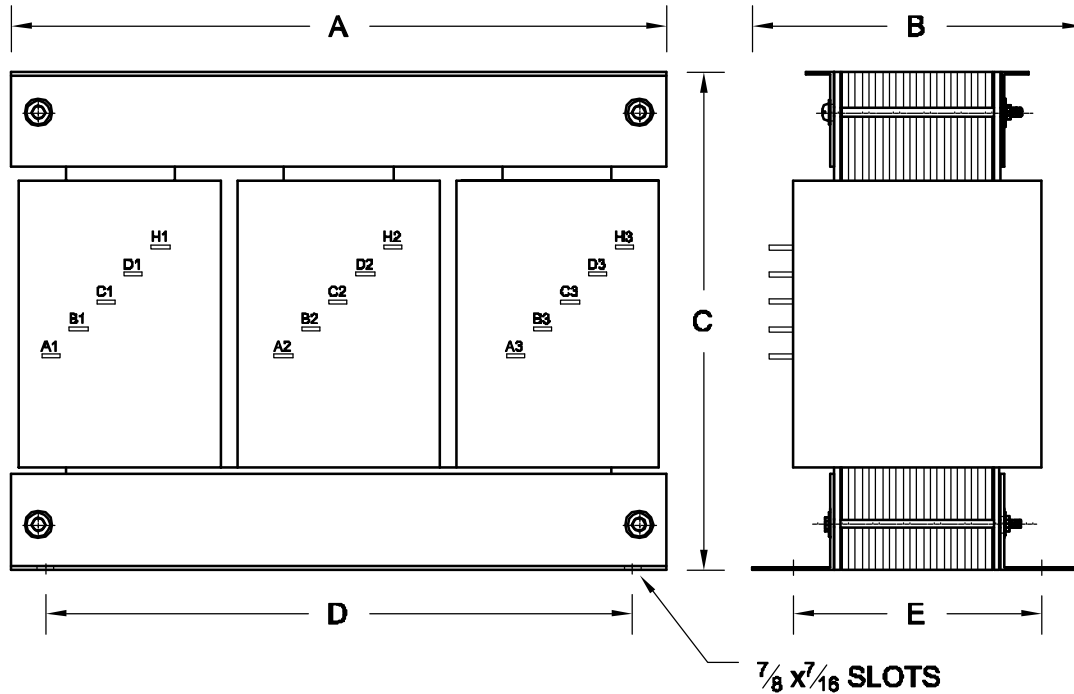

REV.	REMARKS	BY:	DATE:
REX MANUFACTURING DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY:	SARKIS	DATE:	AUGUST 5, 2004
CHECKED BY:	V.S.	DATE:	AUGUST 5, 2004
TITLE:	MOTOR STARTING AUTO-TRANSFORMER OUTLINE 3 PHASE, 60 HP, 600 V		
SCALE:	N.T.S.	PO#:	