

- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 6300 LBS
ENCLOSURE: 1050 LBS
TOTAL: 7350 LBS

TRANSFORMER:

KVA: 1250

PRIMARY VOLTAGE CLASS: 1.2 KV

PRIMARY VOLTAGE: 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____

2x2.5% FCAN, 2x2.5% FCBN

PRIMARY TAPS: 240V/138 VOLTS
OR
 208Y/120 VOLTS
OR
 OTHER _____

10 KV
10 KV
220°C
150°C
STANDARD
STANDARD

PRIMARY BILL:

SECONDARY BIL:
INSULATION CLASS:
TEMPERATURE RISE:
IMPEDANCE:
SOUND LEVEL:

WINDING MATERIAL:

- COPPER
OR
 ALUMINUM


TERMINAL MATERIAL:

- COPPER
OR
 ALUMINUM




STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM

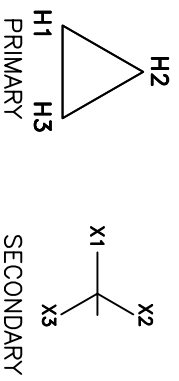

① NAME PLATE

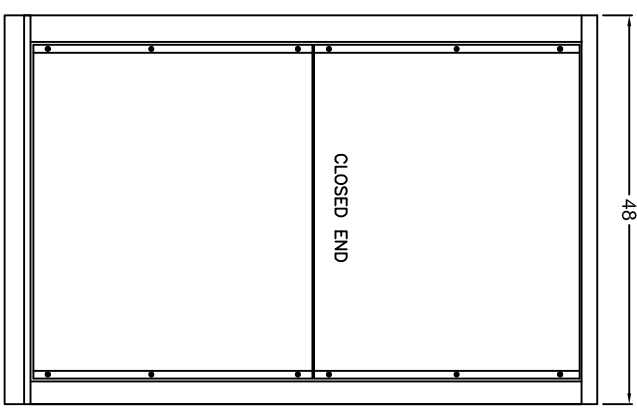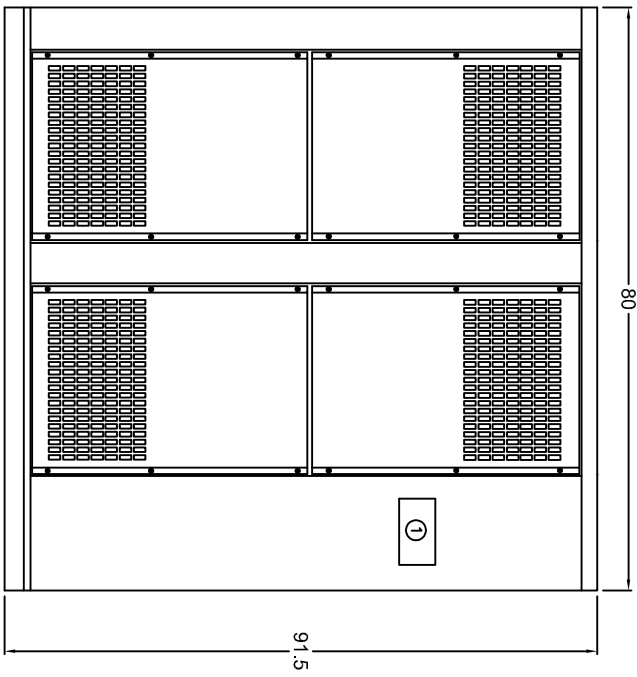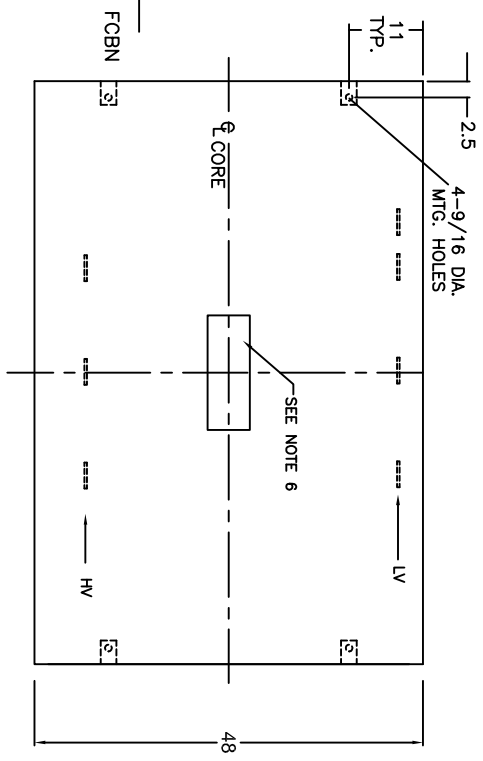

Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.
SCALE: N.T.S. DRAWN BY: SARKIS DATE: MAY 12, 09
CHECKED BY: DHALA DATE: MAY 12, 09
TITLE: 1250KVA 1.2KV CLASS ENCLOSURE OUTLINE
NEMA-1
DRAWING No. 1250KVA-BIL10-1