

- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 6700 LBS
ENCLOSURE: 1050 LBS
TOTAL: 7750 LBS

TRANSFORMER:

KVA: 1500

PRIMARY VOLTAGE CLASS: 1.2 KV

PRIMARY VOLTAGE: 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____

PRIMARY TAPS: 2x2.5% FCAN, 2x2.5% FCBN

SECONDARY VOLTAGE: 240Y/138 VOLTS
OR
 208Y/120 VOLTS
OR
 OTHER _____

PRIMARY B.I.L.: 10 KV

SECONDARY B.I.L.: 10 KV

INSULATION CLASS: 220°C

TEMPERATURE RISE: 150°C

IMPEDANCE: STANDARD


SOUND LEVEL: STANDARD

WINDING MATERIAL: COPPER
OR
 ALUMINUM




TERMINAL MATERIAL: COPPER
OR
 ALUMINUM

STANDARD FEATURES: ANTI-VIBRATION PADS

VECTOR DIAGRAM

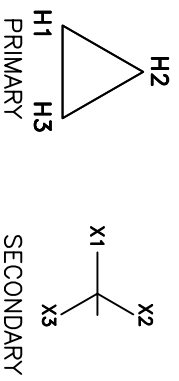

① NAME PLATE

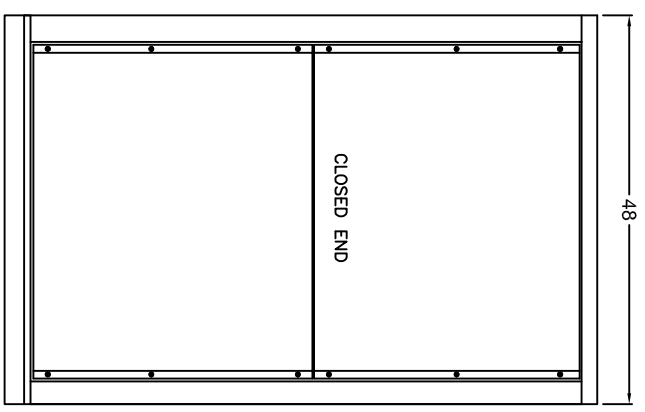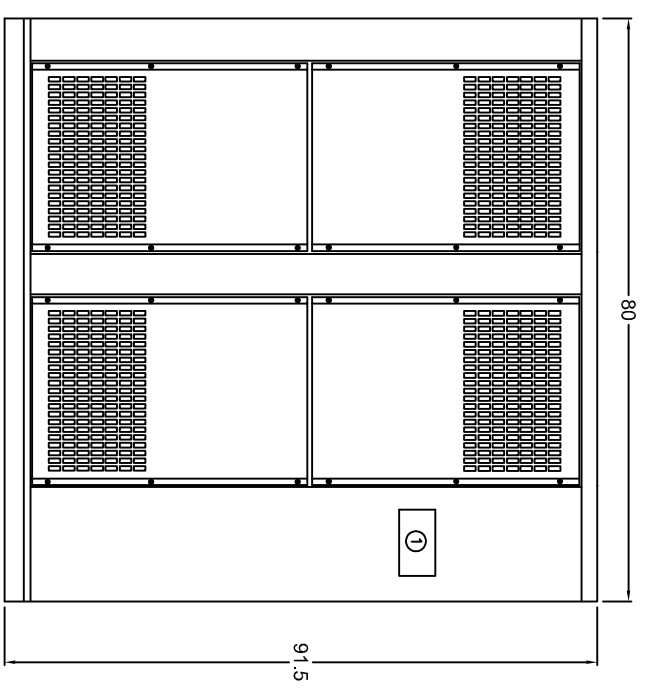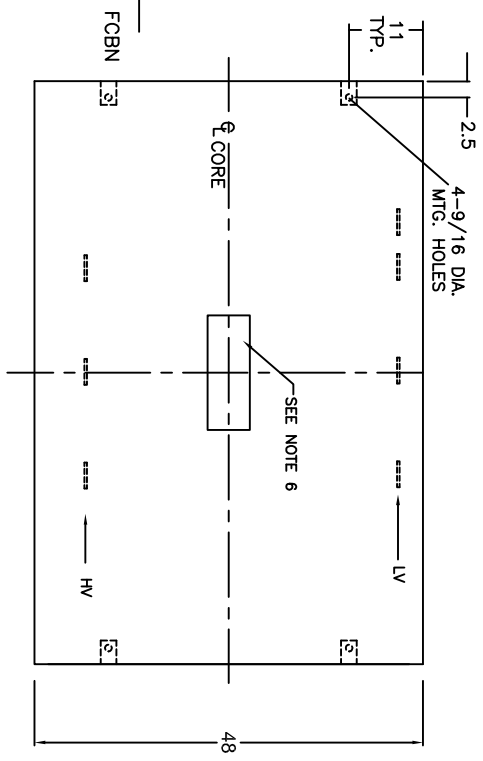

Note: Dimensions may change if units are co-ordinated with switchgear. Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.
SCALE: N.T.S. DRAWN BY: SARKIS DATE: MAY 12, 09
CHECKED BY: DHAL REV: 0
TITLE: 1500KVA 1.2KV CLASS ENCLOSURE OUTLINE
NEMA-1
DRAWING No. 1500KVA-BIL10-1