


- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
  2. METAL GAUGE TO CSA-C22 No. 94-M91
  3. PAINT ASA # 61 GRAY
  4. BOLTED, KNOCK DOWN CONSTRUCTION
  5. OPEN BOTTOM
  6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)  
INDOOR USE




APPROX. WEIGHT:  
CORE & COIL: 8400 LBS  
ENCLOSURE: 1250 LBS  
TOTAL: 9650 LBS

TRANSFORMER:  
KVA: 2250  
PRIMARY VOLTAGE CLASS: 1.2 KV  
PRIMARY VOLTAGE:  
 600 VOLTS DELTA  
OR  
 480 VOLTS DELTA  
OR  
 OTHER \_\_\_\_\_  
PRIMARY TAPS:  
 2x2.5% FCAN, 2x2.5% FCBN  
SECONDARY VOLTAGE:  
 240Y/138 VOLTS  
OR  
 208Y/120 VOLTS  
OR  
 OTHER \_\_\_\_\_

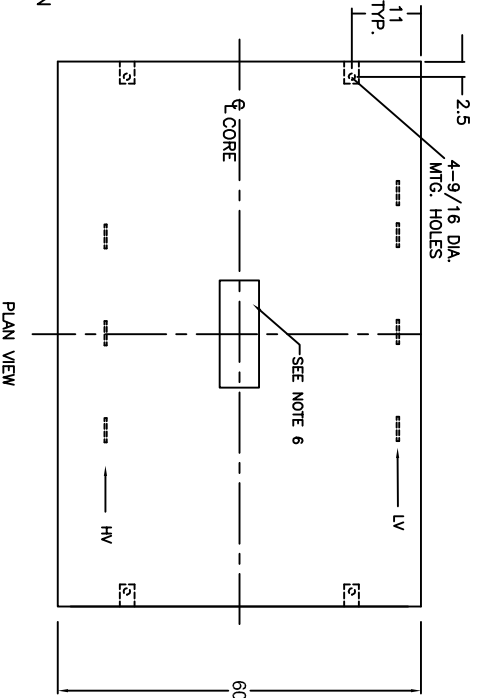

PRIMARY B.I.L.: 10 KV  
SECONDARY B.I.L.: 10 KV  
INSULATION CLASS: 220°C  
TEMPERATURE RISE: 150°C  
IMPEDANCE: STANDARD  
SOUND LEVEL: STANDARD

WINDING MATERIAL:  
 COPPER  
OR  
 ALUMINUM  
TERMINAL MATERIAL:  
 COPPER  
OR  
 ALUMINUM  
STANDARD FEATURES:  
 ANTI-VIBRATION PADS

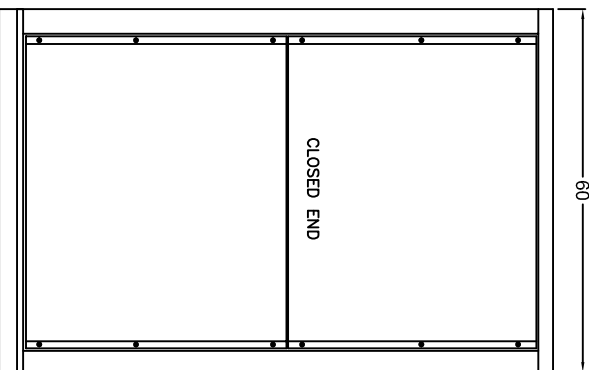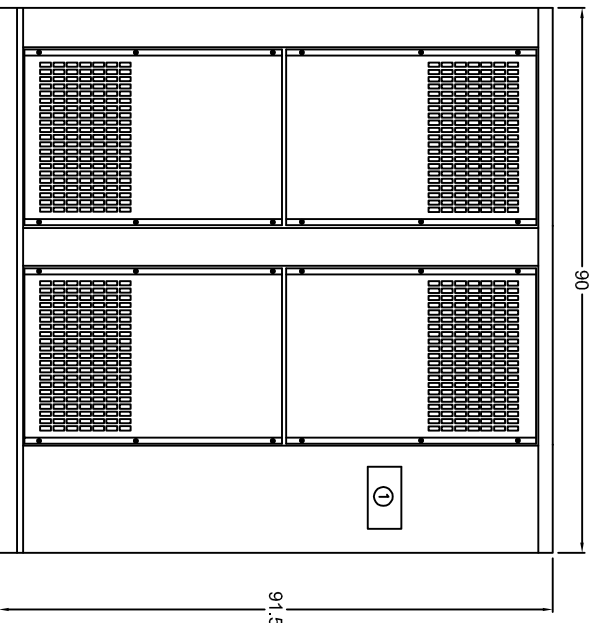

① NAME PLATE

Note: Dimensions may change if units are co-ordinated with switchgear.  
Dimensions are estimates. For firm dimensions contact factory.

REV.		REMARKS		BY	DATE
<p><b>REX POWER MAGNETICS</b> DIVISION OF TRANSFORMER INDUSTRIES INC. SCALE: N.T.S. DRAWING BY: SARKIS DATE: MAY 12, 09 JOB: 2250KVA 1.2KV CLASS ENCLOSURE OUTLINE TITLE: 2250KVA 1.2KV CLASS ENCLOSURE OUTLINE NEMA-1</p>					
DRAWING No. 2250KVA-BIL10-1					