


- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 8700 LBS
ENCLOSURE: 1250 LBS
TOTAL: 9950 LBS

TRANSFORMER:
KVA: 2500
PRIMARY VOLTAGE CLASS: 1.2 KV
PRIMARY VOLTAGE:
 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____
PRIMARY TAPS:
 2x2.5% FCAN, 2x2.5% FCBN
SECONDARY VOLTAGE:
 240Y/138 VOLTS
OR
 208Y/120 VOLTS
OR
 OTHER _____

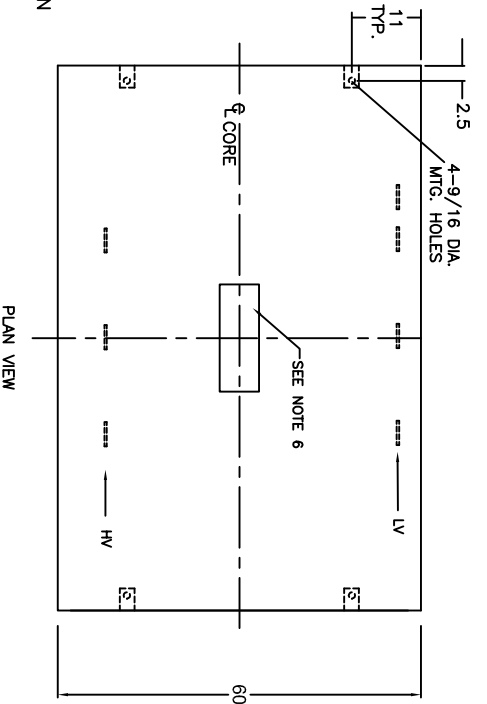

PRIMARY B.I.L.: 10 KV
SECONDARY B.I.L.: 10 KV
INSULATION CLASS: 220°C
TEMPERATURE RISE: 150°C
IMPEDANCE: STANDARD
SOUND LEVEL: STANDARD

WINDING MATERIAL:

- COPPER
OR
 ALUMINUM


TERMINAL MATERIAL:

- COPPER
OR
 ALUMINUM



STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM



① NAME PLATE

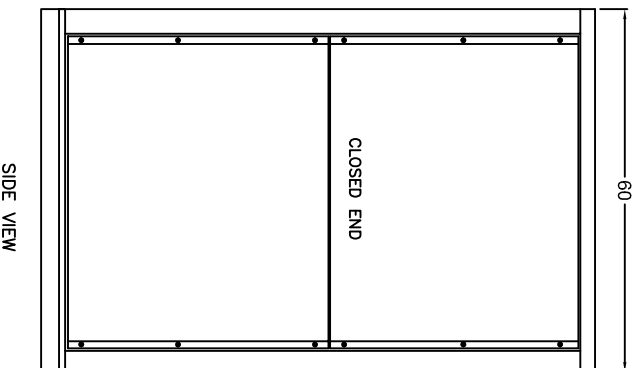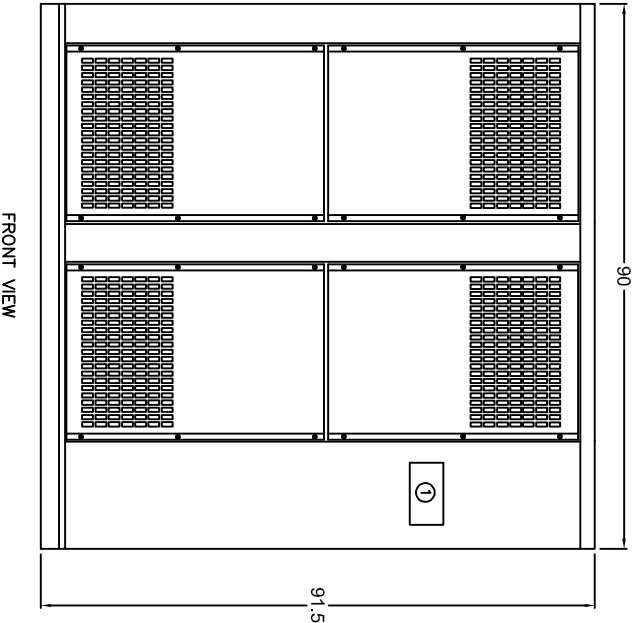

Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFORMER INDUSTRIES INC.
SCALE: N.T.S. DRAWN BY: SARKIS DATE: MAY 12, 09
JOB NO: 2500KVA 1.2KV CLASS ENCLOSURE OUTLINE
DESIGNED BY: DMM DATE: MAY 12, 09
NEMA-1
DRAWING No. 2500KVA-BIL10-1