


- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 9100 LBS
ENCLOSURE: 1300 LBS
TOTAL: 10400 LBS



TRANSFORMER:
KVA: 2750
PRIMARY VOLTAGE CLASS: 1.2 KV
PRIMARY VOLTAGE:
 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____
PRIMARY TAPS:
 2x2.5% FCAN, 2x2.5% FCBN
SECONDARY VOLTAGE:
 240Y/138 VOLTS
OR
 208Y/120 VOLTS
OR
 OTHER _____

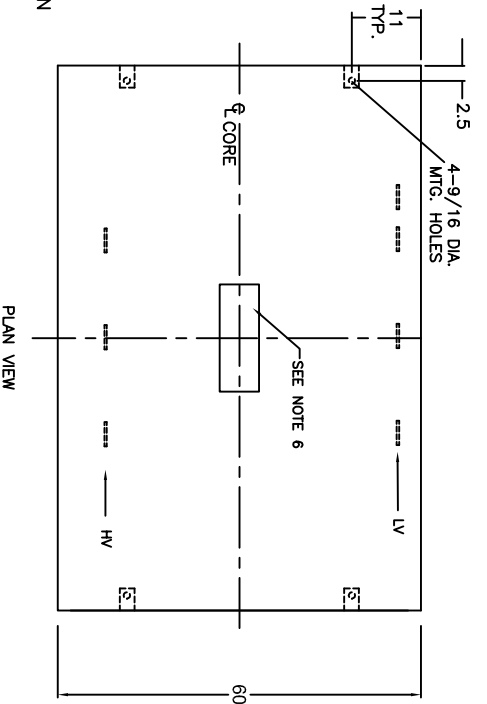


PRIMARY B.I.L.: 10 KV
SECONDARY B.I.L.: 10 KV
INSULATION CLASS: 220°C
TEMPERATURE RISE: 150°C
IMPEDANCE: STANDARD
SOUND LEVEL: STANDARD

WINDING MATERIAL:
 COPPER
OR
 ALUMINUM
TERMINAL MATERIAL:
 COPPER
OR
 ALUMINUM
STANDARD FEATURES:
 ANTI-VIBRATION PADS

VECTOR DIAGRAM

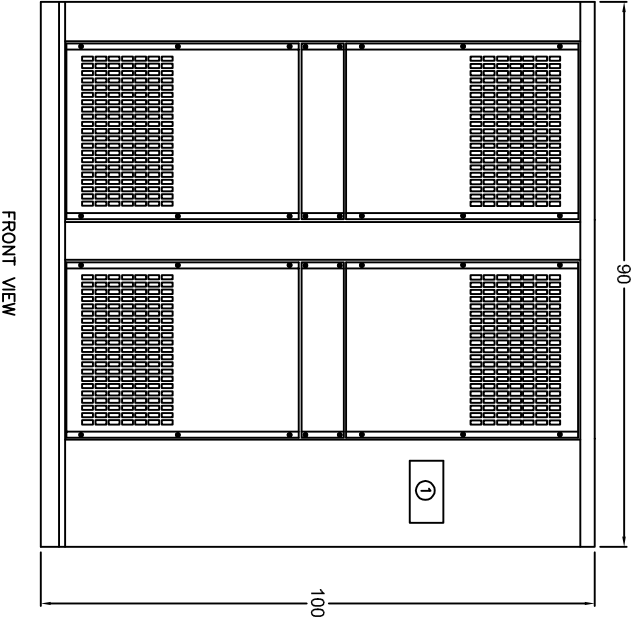

① NAME PLATE

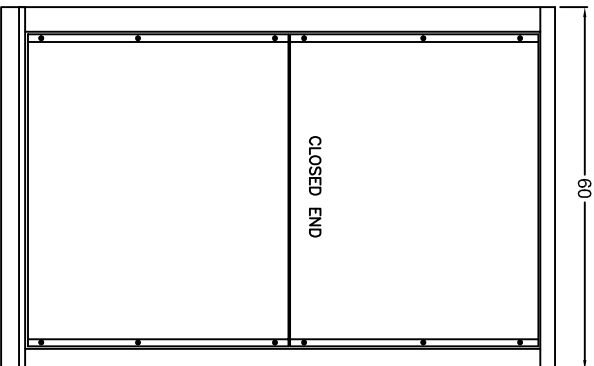

Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS			
DIVISION OF TRANSFORMER INDUSTRIES INC.			
SCALE: N.T.S.	DRAWN BY: SARKIS	DATE: MAY 12, 09	REV: 0
TITLE: 2750KVA 1.2KV CLASS ENCLOSURE OUTLINE	DESIGNED BY: DMM	DATE: MAY 12, 09	REV: 0
NEMA-1			
DRAWING No. 2750KVA-BIL10-1			