


- NOTE:**
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
 CORE & COIL: 3900 LBS
 ENCLOSURE: 1050 LBS
 TOTAL: 4950 LBS

TRANSFORMER:
 KVA: 450
PRIMARY VOLTAGE CLASS: 18 KV
 PRIMARY VOLTAGE:
 13800 VOLTS DELTA
 OR
 12470 VOLTS DELTA
 OR
 OTHER _____
 PRIMARY TAPS:
 2x2.5% FCAN, 2x2.5% FCBN
 SECONDARY VOLTAGE:
 600V/347 VOLTS
 OR
 480V/277 VOLTS
 OR
 OTHER _____

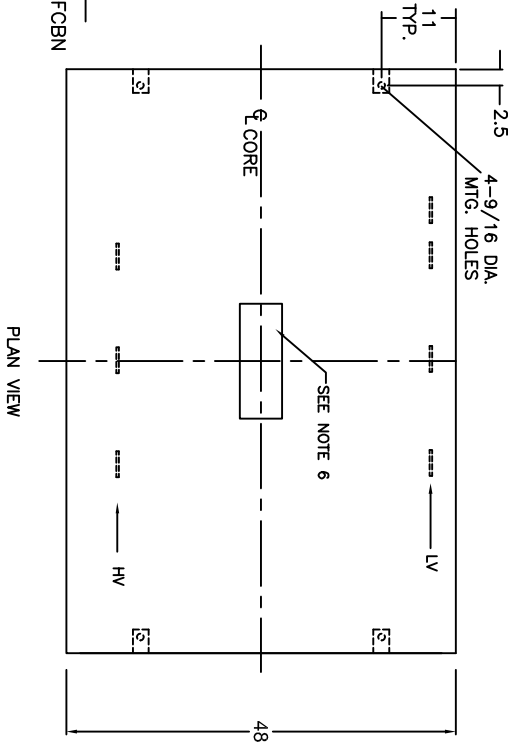

PRIMARY B.I.L.:
 SECONDARY BIL: 95 KV
 INSULATION CLASS: 10 KV
 TEMPERATURE RISE: 220°C
 IMPEDANCE: 150°C
 SOUND LEVEL: STANDARD STANDARD

WINDING MATERIAL:

- COPPER
 OR
 ALUMINUM


TERMINAL MATERIAL:

- COPPER
 OR
 ALUMINUM



STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM

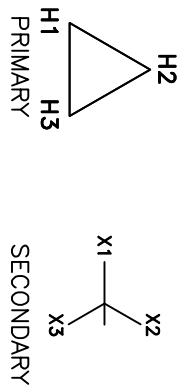

① NAME PLATE

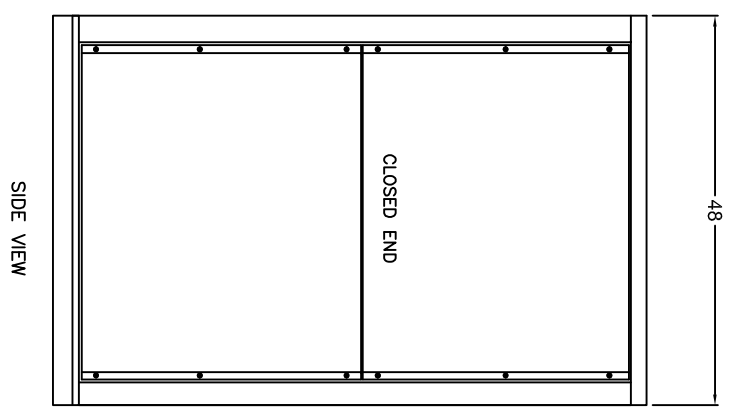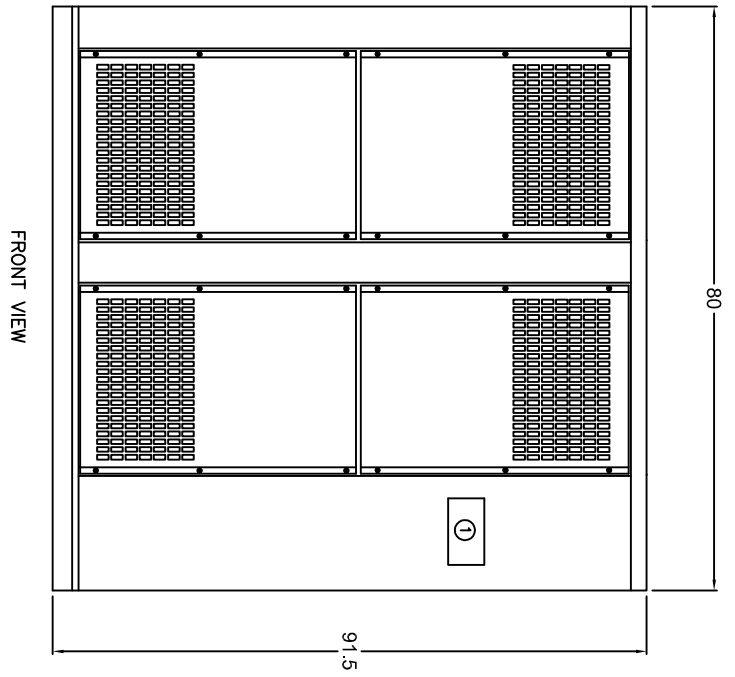

Note: Dimensions may change if units are co-ordinated with switchgear.
 Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
 DIVISION OF TRANSFACTOR INDUSTRIES INC.
 10000 W. 120th Ave., Denver, CO 80231
 PHONE: 303-751-1000 FAX: 303-751-1001
 TITLE: 450KVA 18KV CLASS ENCLOSURE OUTLINE
 NEMA-1
 DRAWING No. 450KVA-BIL95-1