

- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION

TRANSFORMER:

KVA: 750

PRIMARY VOLTAGE CLASS: 1.2 KV

- PRIMARY VOLTAGE:
- 600 VOLTS DELTA
 - OR
 - 480 VOLTS DELTA
 - OR
 - OTHER _____

- PRIMARY TAPS:
- 2x2.5% FCAN, 2x2.5% FCBN
 - 240Y/138 VOLTS
 - OR
 - 208Y/120 VOLTS
 - OR
 - OTHER _____

SECONDARY VOLTAGE: 10 KV

SECONDARY BIL: 10 KV

INSULATION CLASS: 220°C

TEMPERATURE RISE: 150°C

IMPEDANCE: STANDARD

SOUND LEVEL: STANDARD

WINDING MATERIAL:

- COPPER
- OR
- ALUMINUM



TERMINAL MATERIAL:

- COPPER
- OR
- ALUMINUM

STANDARD FEATURES:



- ANTI-VIBRATION PADS

VECTOR DIAGRAM

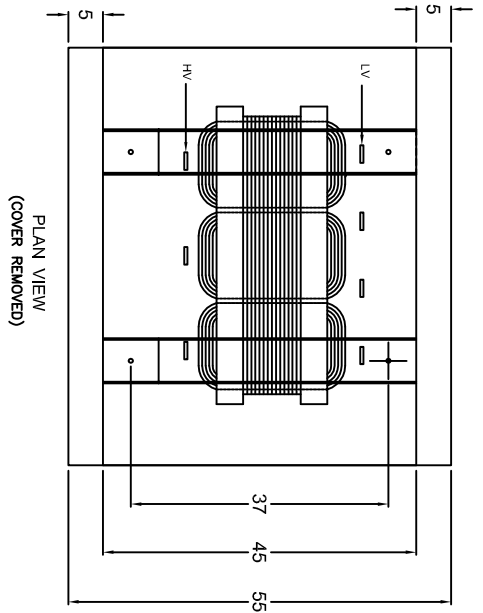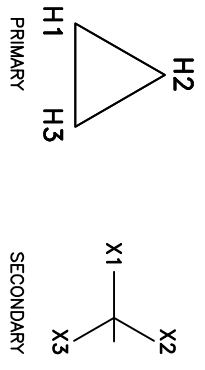

ENCLOSURE: CSA TYPE 3R (NEMA 3R)
INDOOR/OUTDOOR USE

APPROX. WEIGHT: 3300 LBS
CORE & COIL: 700 LBS
ENCLOSURE: 4000 LBS
TOTAL:

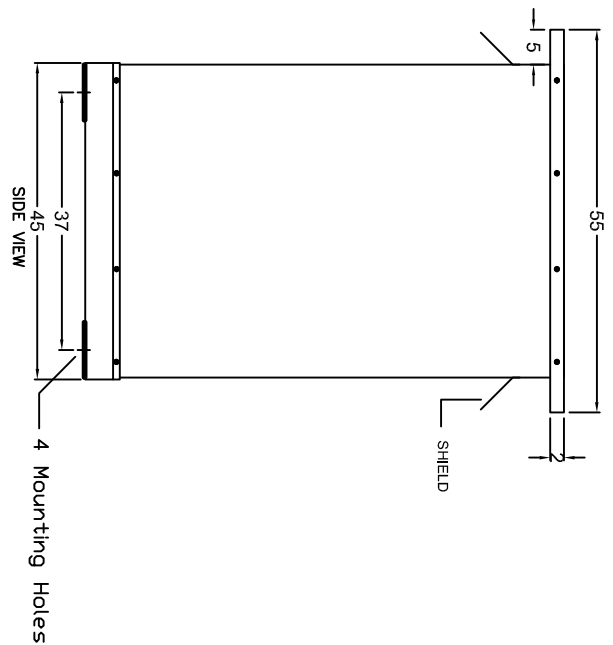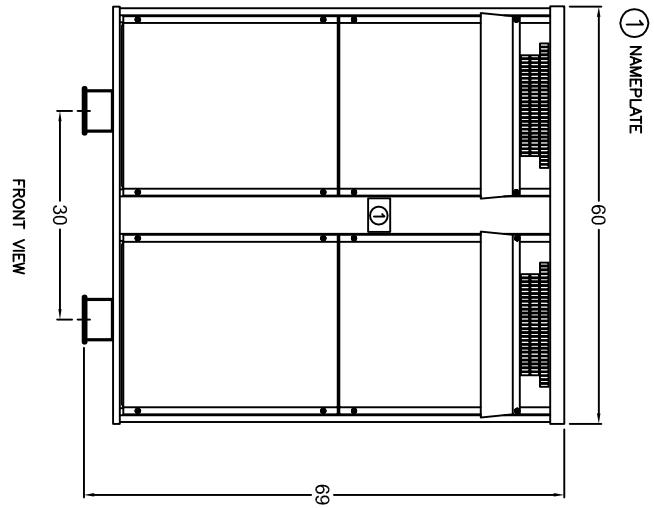

Note: Dimensions may change if units are co-ordinated with switchgear. Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.

DESIGNER: N.T.S. PROJECT: SARKIS DATE: MAY 11, 09
CHECKED BY: DMH DATE: MAY 11, 09

750KVA 1.2KV CLASS ENCLOSURE OUTLINE

DRAWING No. 750KVA-BIL10-1