


- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS


CSA TYPE 3R (NEMA 3R)
INDOOR/OUTDOOR USE

APPROX. WEIGHT:
CORE & COIL: 9100 LBS
ENCLOSURE: 1300 LBS
TOTAL: 10400 LBS

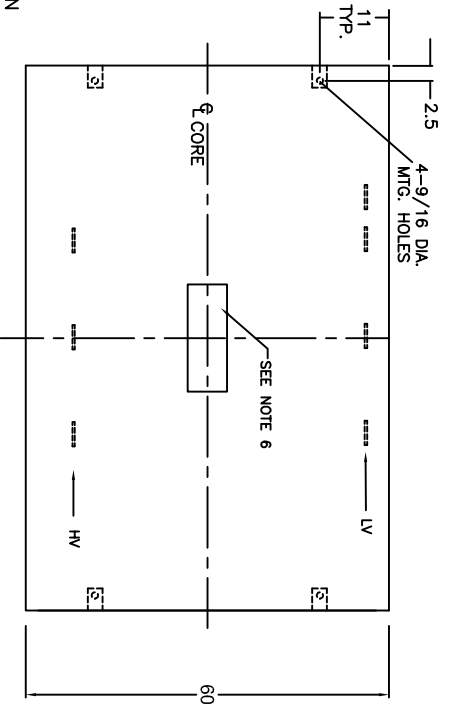


PLAN VIEW
(COVER REMOVED)

VENTILATION LOUVRES

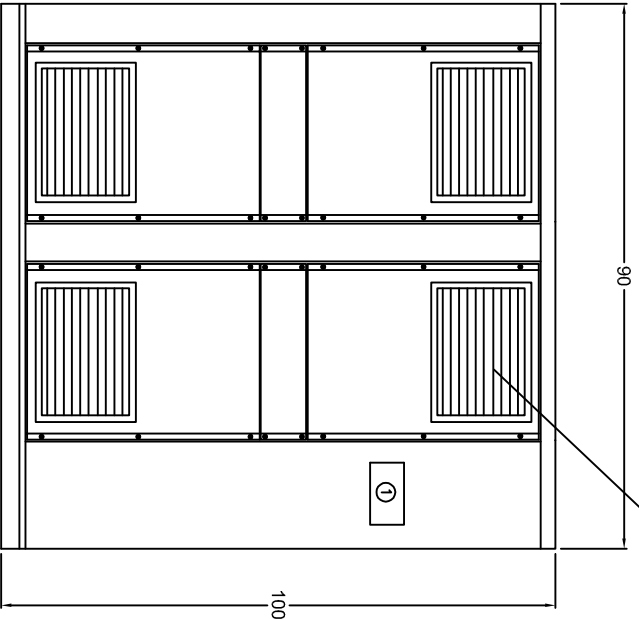

FRONT VIEW

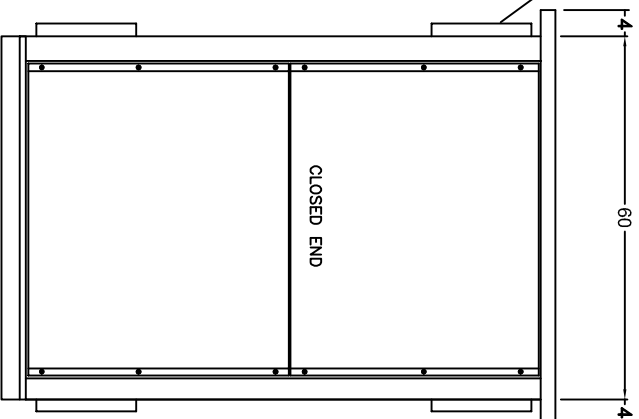

SIDE VIEW

TRANSFORMER:

KVA: 2750

PRIMARY VOLTAGE CLASS: 1.2 KV

PRIMARY VOLTAGE: 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____

PRIMARY TAPS: 2x2.5% FCAN, 2x2.5% FCBN

SECONDARY VOLTAGE: 240V/138 VOLTS
OR
 208V/120 VOLTS
OR
 OTHER _____

PRIMARY B.I.L.:

SECONDARY BIL: 10 KV
INSULATION CLASS: 10 KV
TEMPERATURE RISE: 220°C
IMPEDANCE: 150°C
SOUND LEVEL: STANDARD
STANDARD

WINDING MATERIAL:

- COPPER
OR
 ALUMINUM


TERMINAL MATERIAL:

- COPPER
OR
 ALUMINUM

STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM



① NAME PLATE

Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFORMER INDUSTRIES INC.
SCALE: N.T.S.
JOB: 2750KVA 1.2KV CLASS ENCLOSURE OUTLINE
DRAWN BY: SARKIS
DATE: MAY 12, 09
CHECKED BY: DWAM
DATE: MAY 12, 09
NEMA-3R
DRAWING No. 2750KVA-BIL10-3R