
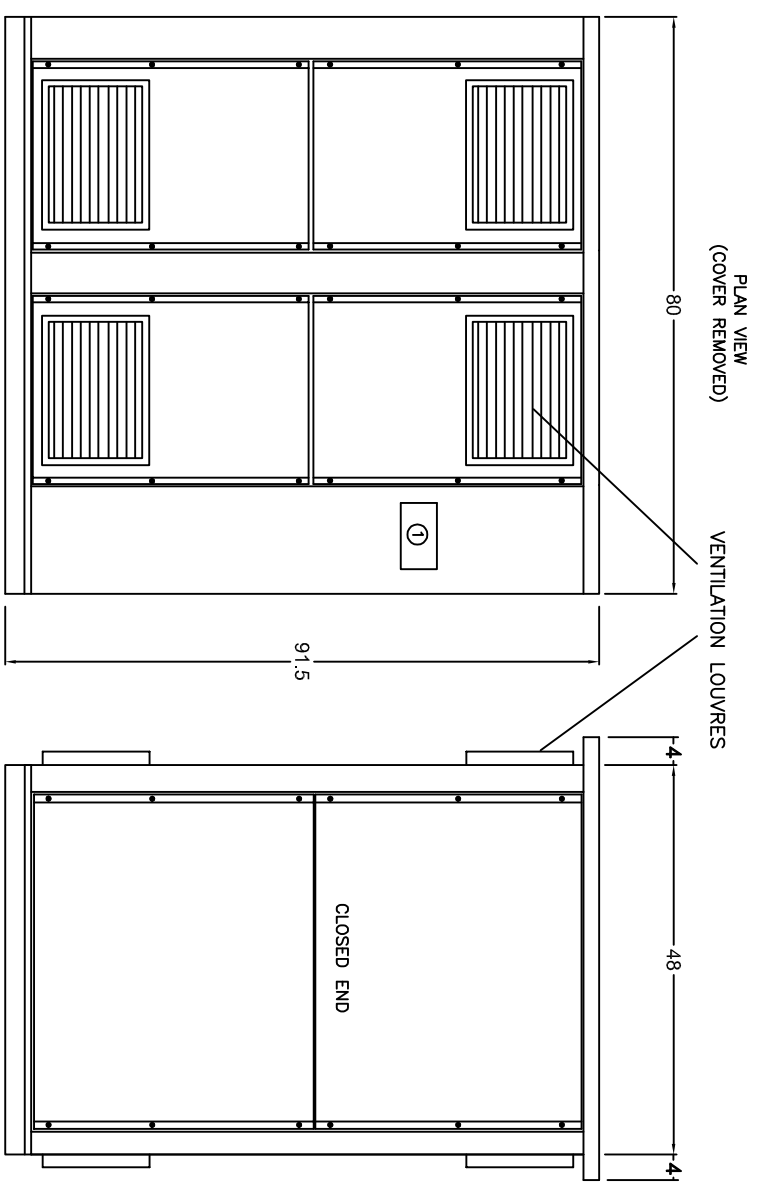


NOTE:

1. TRANSFORMER SITS ON ENCLOSURE BASE
2. METAL GAUGE TO CSA-C22 No. 94-M91
3. PAINT ASA # 61 GRAY
4. BOLTED, KNOCK DOWN CONSTRUCTION
5. OPEN BOTTOM
6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 3R (NEMA 3R)
INDOOR/OUTDOOR USE

APPROX. WEIGHT:
CORE & COIL: 3900 LBS
ENCLOSURE: 1050 LBS
TOTAL: 4950 LBS

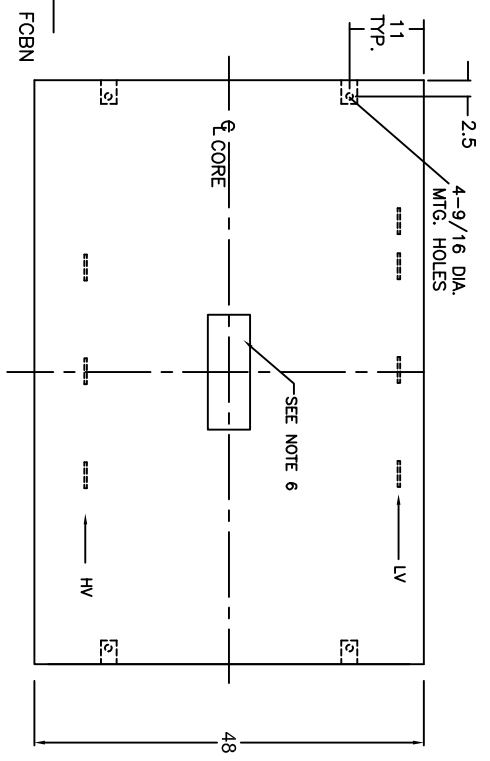

TRANSFORMER:

KVA: 450

PRIMARY VOLTAGE CLASS: 18 KV

- 13800 VOLTS DELTA
- OR
- 12470 VOLTS DELTA
- OR
- OTHER _____

PRIMARY TAPS:

- 2x2.5% FCAN, 2x2.5% FCBN
- 600Y/347 VOLTS
- OR
- 480Y/277 VOLTS
- OR
- OTHER _____

PRIMARY B.I.L.:

SECONDARY BIL: 95 KV
 INSULATION CLASS: 10 KV
 TEMPERATURE RISE: 220°C
 IMPEDANCE: 150°C
 SOUND LEVEL: STANDARD STANDARD

WINDING MATERIAL:

- COPPER
- OR
- ALUMINUM


TERMINAL MATERIAL:

- COPPER
- OR
- ALUMINUM

STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM

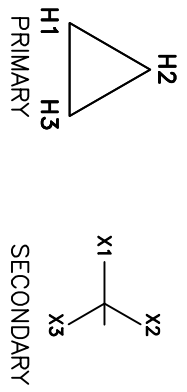

① NAME PLATE

Note: Dimensions may change if units are co-ordinated with switchgear. Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
 DIVISION OF TRANSFACTOR INDUSTRIES INC.
 10000 HWY. 12, 090
 N.T.S. DRAWN BY: SARAKIS DATE: MAY 12, 09
 TITLE: 450KVA 18KV CLASS ENCLOSURE OUTLINE
 NEMA-3R DRAWING No. 450KVA-BIL95-3R