



DIVISION OF TRANSFACTOR INDUSTRIES INC.
 65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
 Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
 www.RexPowerMagnetics.com

ENERGY EFFICIENT TRANSFORMER

-Single Phase Isolation Transformer
 -ANN Self- Cooled

PRELIMINARY DRAWING ONLY
 This drawing may **NOT** truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

Coils: Copper Wound
 Cat. No.: SC15J-K/Z

kVA: 15
 Primary: 600 Volts
 Secondary: 120/240 Volts
 Primary Taps: 2.5 %
 -Taps FCAN 2
 -Taps FCBN 2

Frequency: 60 Hz

Insulation Class: 220° C
 Temperature Rise: 150° C

BIL: 10 kV

Min. Efficiency: 97.7 %
 -Calculated @ 35% Loaded

Impedance: 4.5 - 5.5 %
 Weight: 170 Lbs

Termination	Location	Lug Size
Primary:	Front	2-14 AWG
Secondary:	Front	2-14 AWG

Wiring Connection:

Primary:		
Voltage	% Tap	Connect Lines To:
630	105.0	H5 - H6
615	102.5	H4 - H5
600	100.0	H3 - H4
585	97.5	H2 - H3
570	95.0	H1 - H2

Secondary:		
Voltage	Interconnect:	Connect Loads To:
240	X2 To X3	X1-X4
120	X1 To X3 X2 To X4	X1-X4
120/240	X2 To X3	X1-X2-X4 (X2 is a Neutral)

Standards:




1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E108255

Standard Features:

1. Anti-Vibration pads installed between the enclosure base and the core & coil assembly
2. Ground lug provided

Special Features:

1. Transformer meets Efficiency per CSA C802.2-06
2. Transformer meets NEMA TP-1-2002 Efficiency

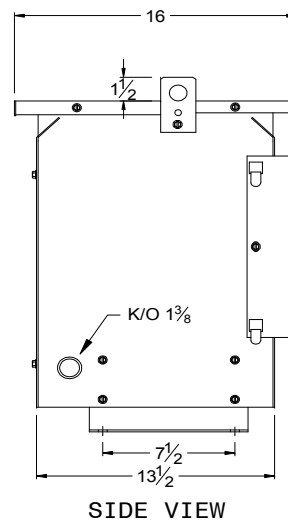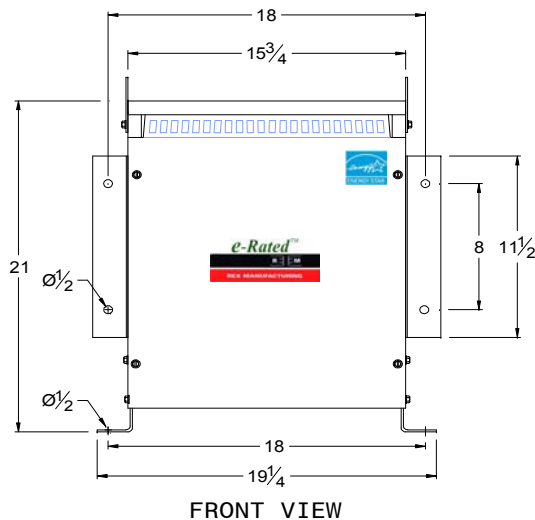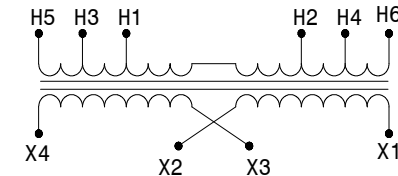

CSA Enclosure:

1. Type 2 (NEMA 2)
 - Sprinklerproof when the angle between sprinkler heads and opening in the enclosure does Not exceed 45 degree from the vertical.
2. Indoor Ventilated
3. ASA 61 Grey
4. Floor/Wall Mounting

Prepared by: AP
 Approved by: VS
 Date: NOV.12, 2008