



DIVISION OF TRANSFACTOR INDUSTRIES INC.
 65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
 Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
 www.RexPowerMagnetics.com

EPOXY ENCAPSULATED TRANSFORMER

- Single Phase Isolation
- Dry Type
- ANC Self Cooled

Purchaser: TBA
 PO#: TBA
 SWO#: TBA
 Qty: TBA

PRELIMINARY DRAWING ONLY
 This drawing may NOT truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

Coils: Copper Wound
 Cat. No.: SC2J-K/EP
 kVA: 2
 Primary: 600 Volts
 Secondary: 120/240 Volts
 Frequency: 60 Hz
 Insulation Class: 185° C
 Temperature Rise: 115° C
 Impedance: 5.0 - 8.0 %
 BIL: 10 kV
 Weight: 45 Lbs

| Termination | Location | Terminals |
|-------------|----------|-----------|
| Primary: | Bottom | Leads |
| Secondary: | Bottom | Leads |



Wiring Connection:

Primary:
 Voltage 600 Connect Lines To: H1-H2

Secondary:
 Voltage 240 Interconnect X2 to X3 Connect Loads To: X1-X4
 120 X1 to X3 X1-X4
 X2 to X4
 120/240 X2 to X3 X1-X2-X4
 (X2 is Neutral)

Standards:

1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E108255

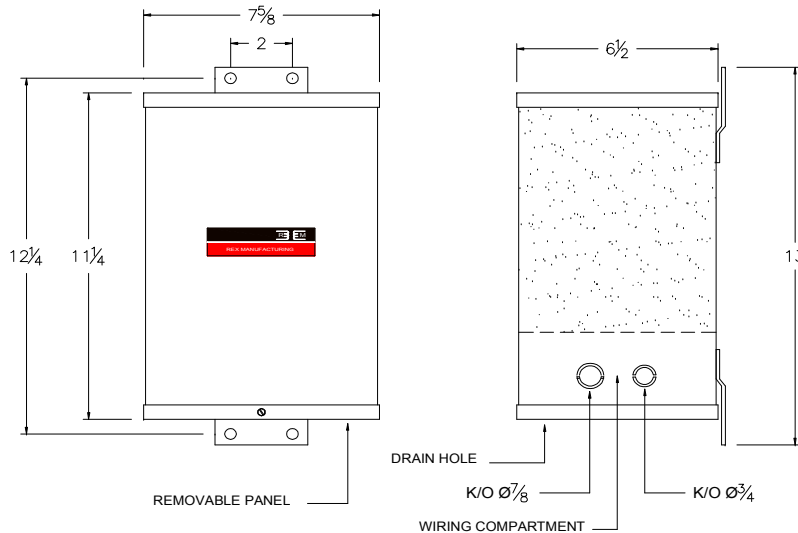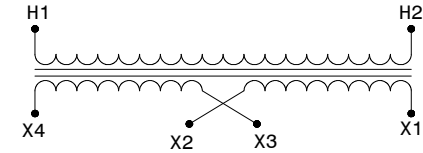

CSA Enclosure:

- Type 3R (NEMA 3R)
- Indoor/Outdoor Ventilated
- ASA 61 Grey
- Wall Mounting

Prepared by: AP
 Approved by: VS
 Date: JAN.25, 2008