


REX MANUFACTURING

DIVISION OF TRANSFACTOR INDUSTRIES INC.

25 BAYWOOD ROAD, REXDALE, ON., M9V 3Y8 TEL.: (416) 747-7818 FAX: (416) 747-1956

**PRELIMINARY SPECIFICATION SHEET
 DRY TYPE ISOLATION TRANSFORMER
 TYPE: ANN-SELF COOLED**

CAT. NO.: BC9HM
KVA: 9
PRIMARY: 480
SECONDARY: 208Y/120
PHASE: 3
HZ: 60

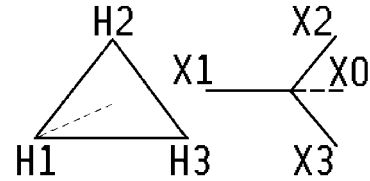

WEIGHT: 143 Lbs
INSULATION CLASS: 220EC
TEMPERATURE RISE: 150EC
IMPEDANCE: 7.0%-8.0%
TAPS: ± 5%
BIL: 10 KV

Wiring Connection:

Primary: H1-H2-H3

Volts	%Taps	Leads Marked
504	105	1-1-1
480	100	2-2-2
456	95	3-3-3

Secondary: X0-X1-X2-X3

Volts	Phase	Connect Loads to:
208	3	X1-X2-X3
120	1	X0-X1
and/or		X0-X2
and/or		X0-X3

TERMINATION/LOCATION:

PRIMARY (HV): 2-14 AWG FRONT
SECONDARY (LV): 2-14 AWG FRONT

STANDARDS:

- CSA Certified
- UL Listed

COILS: Copper Wound

SPECIAL FEATURES: ANTI-VIBRATION PADS INSTALLED.

- CSA Enclosure
- Type2 (NEMA2)
- Sprinklerproof when the angle between sprinkler heads and opening in the enclosure does not exceed 45E from the vertical
- Indoor Ventilated
- ASA 61 Grey
- Floor/Wall Mounting

