



REX POWER MAGNETICS

DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
www.RexPowerMagnetics.com

CONTROL TRANSFORMER

- DRY TYPE
- ANN Self Cooled

Purchaser: TBA
 PO#: TBA
 SWO#: TBA
 Qty: TBA

PRELIMINARY DRAWING ONLY

This drawing may NOT truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

REX's Cat. No.: CS3000J-K
 Customer's P/N: N/A
 VA Rating: 3000
 Primary: 600 Volts
 Secondary: 120/240 Volts
 Frequency: 60 Hz
 Insulation Class: 180° C
 Temperature Rise: 115° C
 Weight: 70.0 Lbs



| Termination | Location | Terminals |
|-------------|----------|-----------------|
| Primary: | Front | Terminal Blocks |
| Secondary: | Back | Terminal Blocks |

Wiring Connection:

| Primary: | Secondary: | Interconnect: | Connect Lines To: | Connect Loads To: |
|----------|------------|---------------|-------------------|---------------------------------|
| 600 | 240 | X2 To X3 | H1-H2 | X1-X4 |
| | 120 | X1 To X3 | | X1-X4 |
| | | X2 To X4 | | |
| | 120/240 | X2 To X3 | | X1-X2-X4 (X2 is a Neutral) |

Standards:

1. CSA Certified
- File No. LR34493
2. UL Listed
- File No. E110286

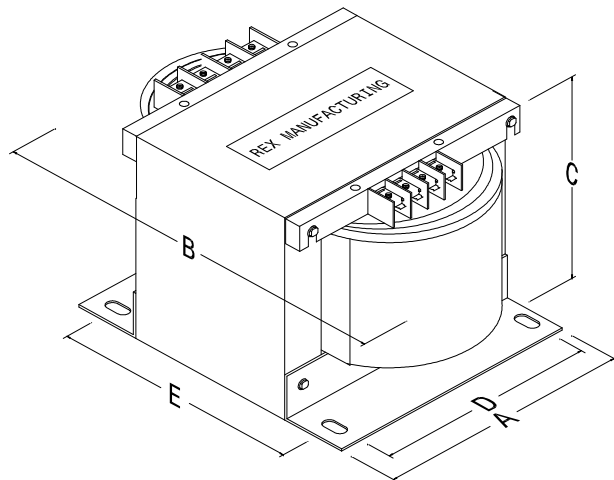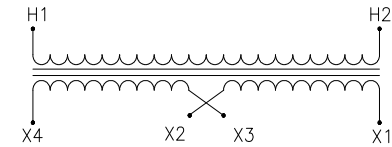

Dimensions (Inches):

| | | |
|---|---|------|
| A | = | 7.50 |
| B | = | 8.00 |
| C | = | 6.25 |
| D | = | 6.00 |
| E | = | 4.68 |

(Mounting Slots: 0.31 X 0.625)

Design:

- Open Construction
- Indoor Application
- Floor/Wall Mounting

Prepared by: AP

Approved by: VS

Date: MAR.10, 2008