


3 PHASE DRIVE ISOLATION TRANSFORMER

TYPE: ANN-SELF COOLED

PRIMARY: H1-H2-H3

VOLTAGE	%TAPS	JUMPERS
483	105	1-1-1
460	100	2-2-2
437	95	3-3-3

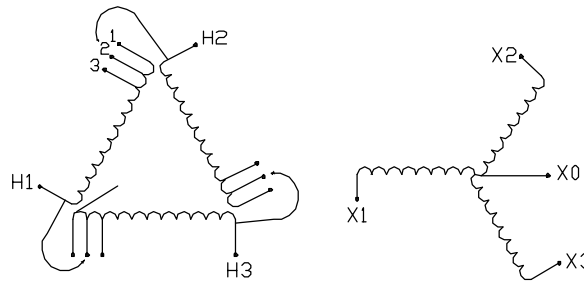

SECONDARY: X0-X1-X2-X3

VOLTAGE	PHASE	TERMINALS
460	3	X1-X2-X3
266	1	X0-X1
266	1	X0-X2
266	1	X0-X3

SPECIAL FEATURES:

- NC 200°C THERMOSTATS ONE IN CENTRE COIL
- SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH A K FACTOR NOT TO EXCEED 4

CAT.NO.:

-REX'S DA14H1P1

-CUSTOMER'S N/A

KVA: 14

PRIMARY: 460 DELTA

TAPS: ±5%

SECONDARY: 460Y/266 V

IMPEDANCE: 5.0%

INSULATION CLASS: 220° C

TEMPERATURE RISE: 150° C.

BIL: 10 KV.

FREQUENCY: 60 Hz

WEIGHT: 220 Lbs

COILS: ALUMINUM WOUND

TERMINATION:

-PRIMARY 2-14 AWG LUGS

-SECONDARY 2-14 AWG LUGS

STANDARDS:

-CSA CERTIFIED

-UL LISTED

CSA ENCLOSURE:


-TYPE 2 (NEMA 2)

-DRIPPROOF

-INDOOR USE

-ASA 61 GREY

-FLOOR/WALL MOUNTING

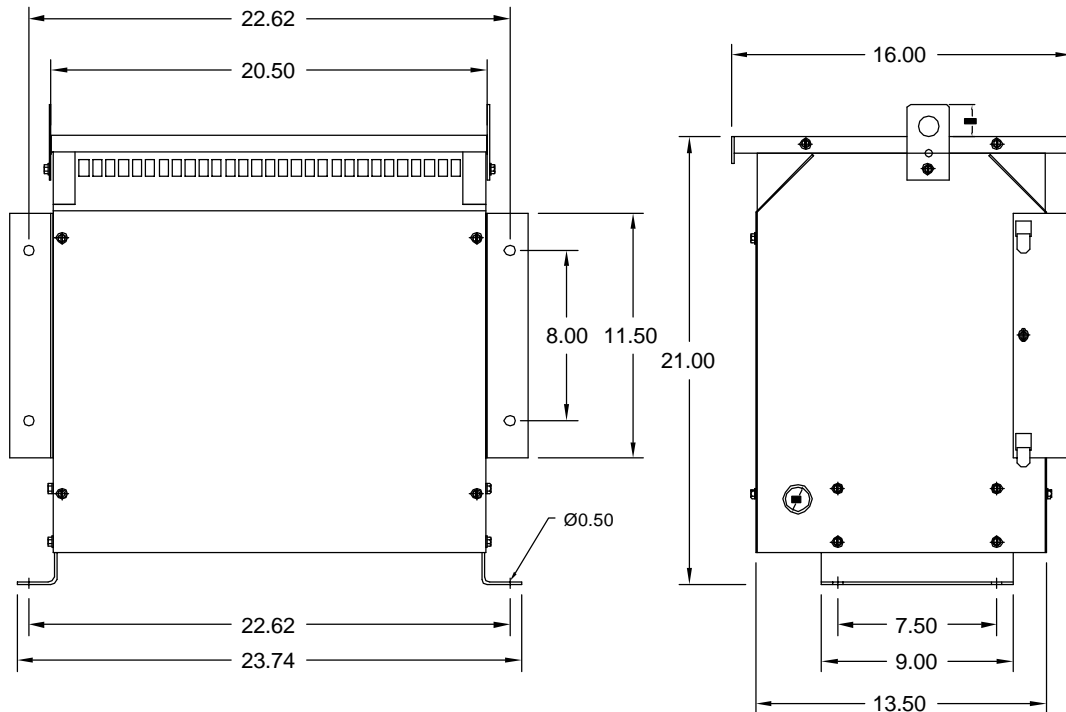

REV.	REMARKS	BY:	DATE:
 REX POWER MAGNETICS <small>DIVISION OF TRANSFACTOR INDUSTRIES INC.</small>			
DRAWN BY:	SARKIS	DATE:	AUGUST 19, 2004
CHECKED BY:	vs	DATE:	AUGUST 19, 2004
REV.:	0	SWO#:	0
TITLE: TRANSFORMER OUTLINE 3 PHASE, 14 kVA, 460D, 460Y/266, ALUMINUM			
SCALE:	N.T.S.	CUSTOMER:	NO: 1-1