

3 PHASE DRIVE ISOLATION TRANSFORMER


TYPE: ANN-SELF COOLED

PRIMARY: H1-H2-H3

VOLTAGE	%TAPS	JUMPERS
483	105.0	1-1-1
471	102.5	2-2-2
460	100.0	3-3-3
448	95.0	4-4-4
437	97.5	5-5-5

SECONDARY: X0-X1-X2-X3

VOLTAGE	PHASE	TERMINALS
460	3	X1-X2-X3
266	1	X0-X1
266	1	X0-X2
266	1	X0-X3

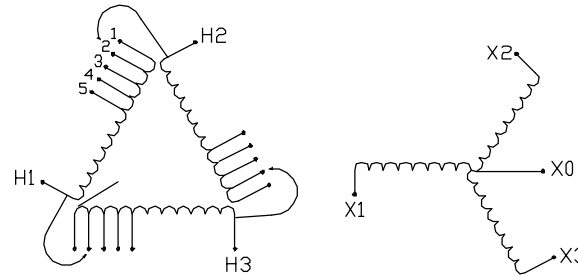

SPECIAL FEATURES:

- NC 200°C THERMOSTATS ONE IN CENTRE COIL
- SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH A K FACTOR NOT TO EXCEED 4

CAT.NO.:

-REX'S

-CUSTOMER'S

KVA:

PRIMARY:

TAPS:

SECONDARY:

IMPEDANCE:

INSULATION CLASS:

TEMPERATURE RISE:

BIL:

FREQUENCY:

WEIGHT:

COILS:

DA27H1P1

N/A

27

460 DELTA

±2x2.5%

460Y/266 V

5.3%

220° C

150° C.

10 KV.

60 Hz

300 Lbs

ALUMINUM WOUND

TERMINATION:

-PRIMARY

-SECONDARY

2-14 AWG LUGS

2-14 AWG LUGS

STANDARDS:

-CSA CERTIFIED

-UL LISTED

CSA ENCLOSURE:


-TYPE 2 (NEMA 2)


-DRIPPROOF

-INDOOR USE

-ASA 61 GREY

-FLOOR/WALL MOUNTING

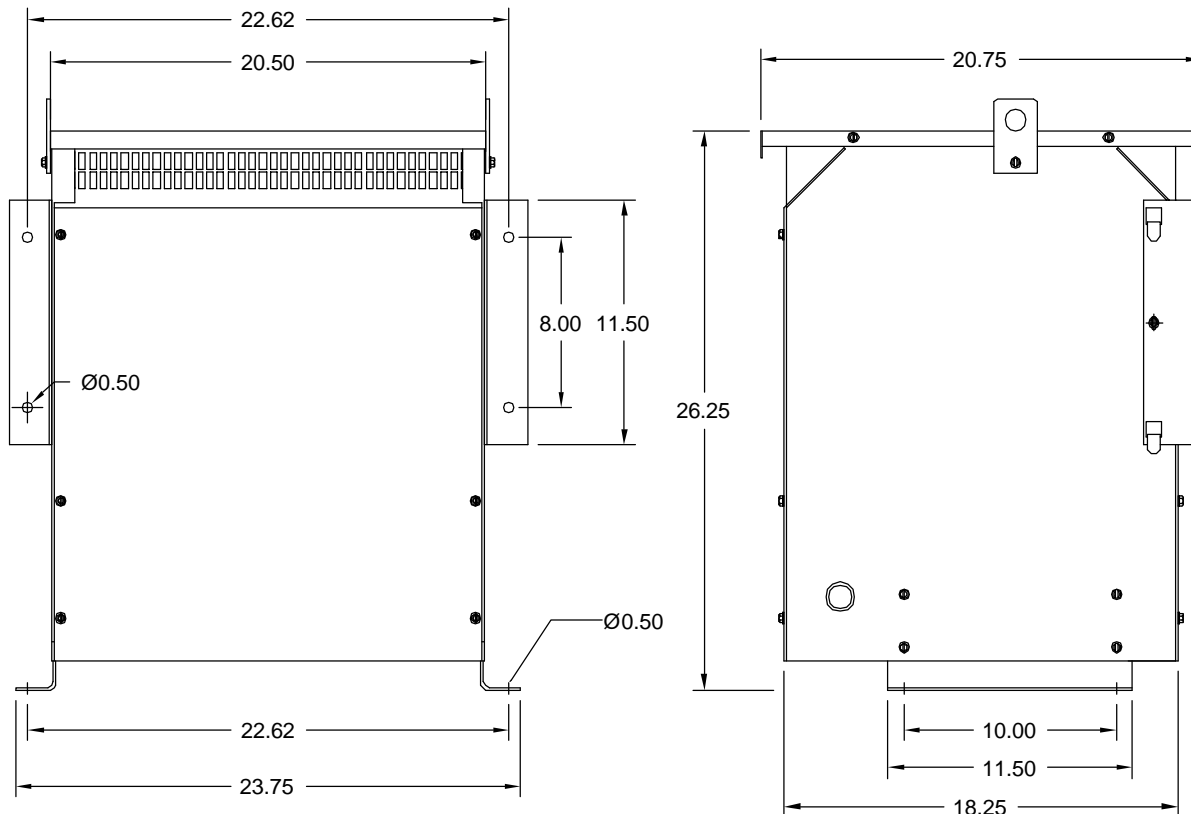

REV.	REMARKS	BY:	DATE:
 REX POWER MAGNETICS DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY:	SARKIS	DATE:	AUGUST 19, 2004
CHECKED BY:	vs	DATE:	AUGUST 19, 2004
REV.:	0	SWO#:	0
TITLE: TRANSFORMER OUTLINE 3 PHASE, 27 KVA, 460D, 460Y/266, ALUMINUM			
SCALE:	N.T.S.	CUSTOMER:	NO: 1-1