

### 3 PHASE DRIVE ISOLATION TRANSFORMER


TYPE: ANN-SELF COOLED

PRIMARY: H1-H2-H3

VOLTAGE	%TAPS	JUMPERS
483	105.0	1-1-1
471	102.5	2-2-2
460	100.0	3-3-3
448	95.0	4-4-4
437	97.5	5-5-5

SECONDARY: X0-X1-X2-X3

VOLTAGE	PHASE	TERMINALS
460	3	X1-X2-X3
266	1	X0-X1
266	1	X0-X2
266	1	X0-X3

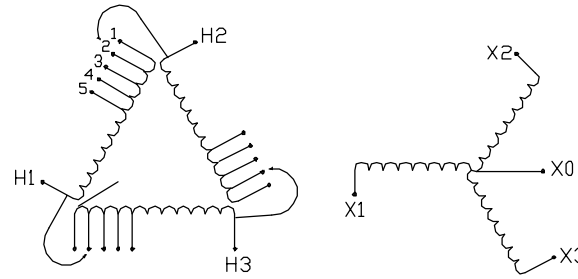

SPECIAL FEATURES:

- NC 200°C THERMOSTATS ONE IN CENTRE COIL
- SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH A K FACTOR NOT TO EXCEED 4

CAT.NO.:

-REX'S DA40H1P1

-CUSTOMER'S N/A

KVA: 40

PRIMARY: 460 DELTA

TAPS: ±2x2.5%

SECONDARY: 460Y/266 V

IMPEDANCE: 6.5%

INSULATION CLASS: 220° C

TEMPERATURE RISE: 150° C.

BIL: 10 KV.

FREQUENCY: 60 Hz

WEIGHT: 310 Lbs

COILS: ALUMINUM WOUND

TERMINATION:

-PRIMARY 2-14 AWG LUGS

-SECONDARY 2-14 AWG LUGS

STANDARDS:

-CSA CERTIFIED

-UL LISTED

CSA ENCLOSURE:


-TYPE 2 (NEMA 2)

-DRIPPROOF

-INDOOR USE

-ASA 61 GREY

-FLOOR/WALL MOUNTING

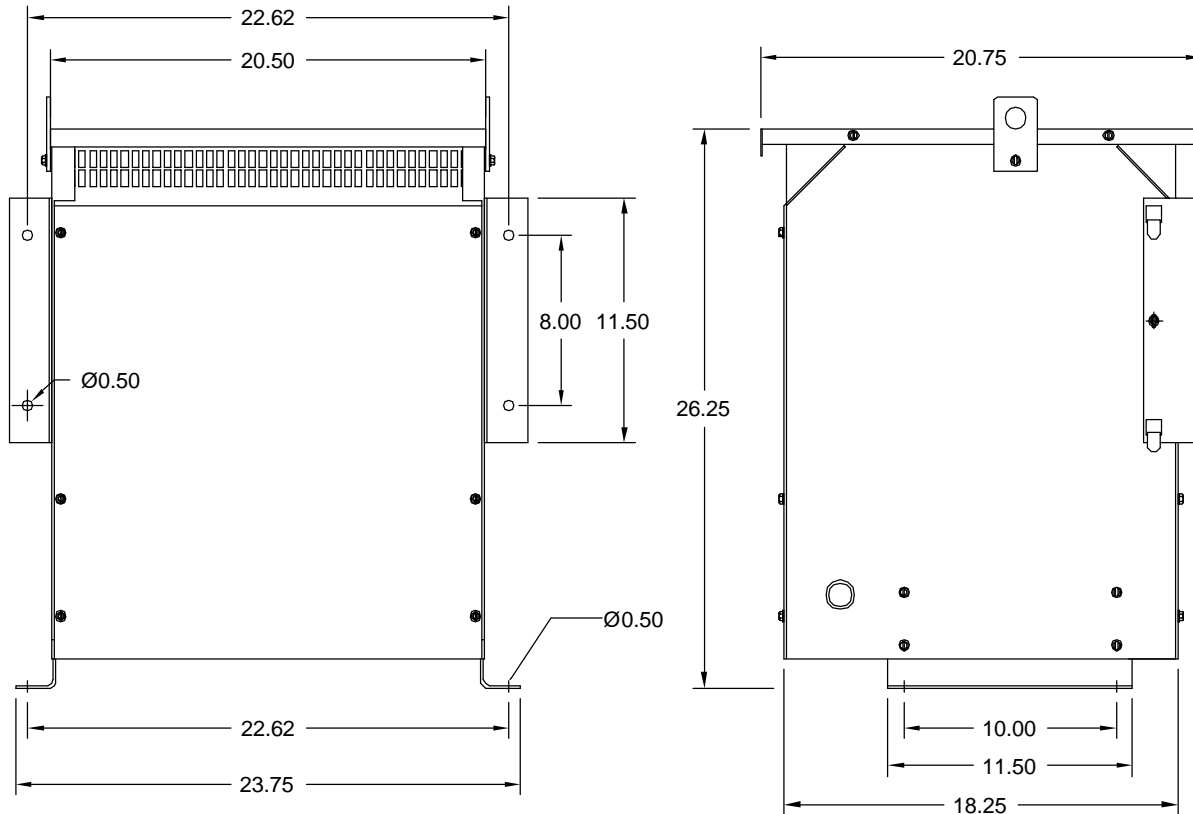

REV.	REMARKS	BY:	DATE:
 <b>REX POWER MAGNETICS</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUGUST 19, 2004	REV.: 0	
CHECKED BY: VS	DATE: AUGUST 19, 2004	SWO#: 0	
TITLE: TRANSFORMER OUTLINE 3 PHASE, 40 KVA, 460D, 460Y/266, ALUMINUM			
SCALE: N.T.S.	CUSTOMER:	NO: 1-1	