


PRIMARY: H1-H2-H3

VOLTAGE	%TAPS	JUMPERS
483	105	1-1-1
471	102.5	2-2-2
460	100	3-3-3
448	97.5	4-4-4
437	95	5-5-5

SECONDARY: X0-X1-X2-X3

VOLTAGE	PHASE	TERMINALS
460	3	X1-X2-X3
266	1	X0-X1
266	1	X0-X2
266	1	X0-X3

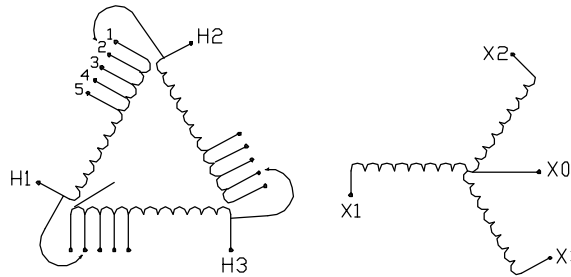

SPECIAL FEATURES:

- NC 200°C THERMOSTATS ONE IN CENTRE COIL
- SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH A K FACTOR NOT TO EXCEED 4

3 PHASE DRIVE ISOLATION TRANSFORMER

TYPE: ANN-SELF COOLED

CAT.NO.:	DA93H1P1
-REX'S	N/A
-CUSTOMER'S	N/A
KVA:	93
PRIMARY:	460 DELTA
TAPS:	±2x2.5%
SECONDARY:	460Y/266
IMPEDANCE:	4.0%
INSULATION CLASS:	220° C
TEMPERATURE RISE:	150° C.
BIL:	10 KV.
FREQUENCY:	60 Hz
WEIGHT:	720 Lbs
COILS:	ALUMINUM WOUND

TERMINATION:


-PRIMARY	2/0-14 AWG LUGS
-SECONDARY	2/0-14 AWG LUGS

STANDARDS:


- CSA CERTIFIED
- UL LISTED

CSA ENCLOSURE:

- TYPE 2 (NEMA 2)
- DRIPPROOF
- INDOOR USE
- ASA 61 GREY
- FLOOR MOUNTING

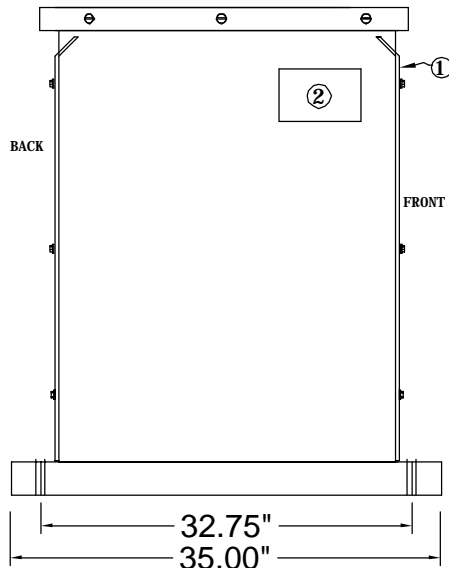


(SIDE)

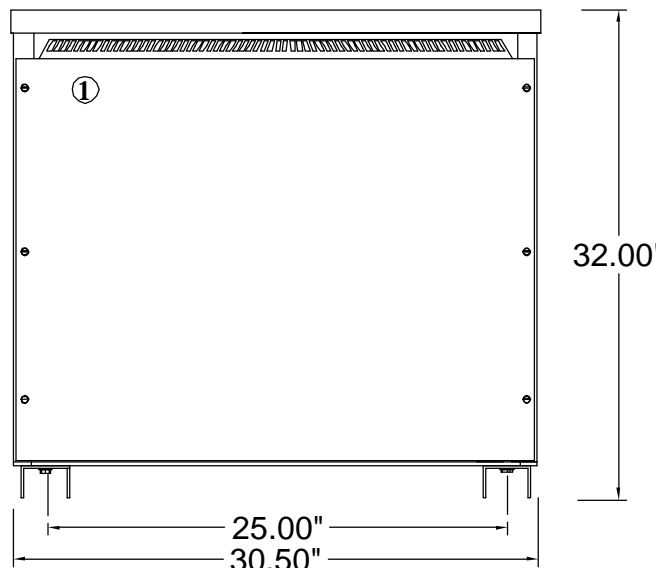

(FRONT)

- ① - REMOVABLE PANELS FOR EASY ACCESS TO TERMINALS
- ② - NAME PLATE

REV.	REMARKS	BY:	DATE:
 REX POWER MAGNETICS DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY:	SARKIS	DATE:	AUGUST 25, 2004
CHECKED BY:	vs	DATE:	AUGUST 25, 2004
REV.:	0	SWO#:	0
TITLE: TRANSFORMER OUTLINE 3 PHASE, 93 kVA, 460D, 460Y/266, ALUMINUM			
SCALE:	N.T.S.	CUSTOMER:	NO: 1-1