

**Single Phase Control Transformer**  
**Open Style Construction**  
**Standard Voltage: 600V - 120/240V**  
 Dimensions are in inches

Fig. #	VA Rating	Overall Dimensions					Mounting Slots	WT (Lbs)	Insulation Class and Temperature Rise
		A	B	C	D	E			
Fig. 1	25	3.00	4.00	2.50	2.50	2.50	0.25 X 0.50	2.3	130° 80°
	50	3.00	4.00	2.50	2.50	2.50	0.25 X 0.50	3.0	
	75	3.00	4.50	2.50	2.50	2.50	0.25 X 0.50	4.0	
	100	3.00	5.00	2.50	2.50	3.00	0.25 X 0.50	5.0	
	150	3.75	4.25	3.13	3.25	3.50	0.25 X 0.50	6.0	
	200	3.75	4.50	3.13	3.25	3.50	0.25 X 0.50	8.0	
	250	3.75	5.00	3.13	3.25	3.50	0.25 X 0.50	10.0	
	350	4.50	4.50	3.75	3.75	3.75	0.31 X 0.625	12.0	
	500	5.25	5.00	4.38	4.50	3.75	0.31 X 0.625	14.0	
	750	5.25	6.00	4.38	4.50	3.75	0.31 X 0.625	18.0	180° 115°
	1000	5.25	7.00	4.38	4.50	4.75	0.31 X 0.625	23.0	
	1500	6.75	5.50	5.63	5.00	3.75	0.31 X 0.625	28.0	
	2000	7.50	6.50	6.25	6.00	3.75	0.31 X 0.625	35.0	
3000	7.50	8.00	6.25	6.00	5.00	0.31 X 0.625	55.0		
Fig. 2	5000	9.00	10.00	8.00	8.00	7.00	0.31 X 0.625	80.0	

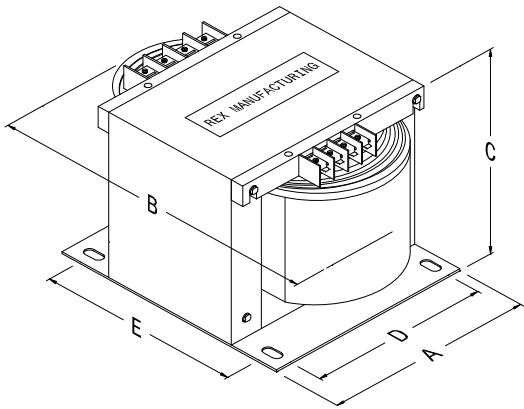


Fig. 1

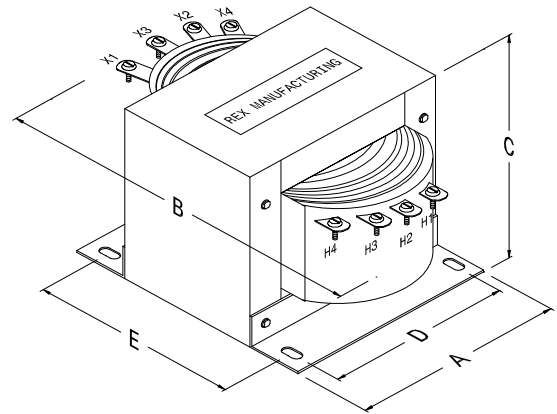


Fig. 2