NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
2. METAL GAUGE TO CSA–C22 No. 94–M91
3. PAINT ASA # 61 GRAY
4. BOLTED, KNOCK DOWN CONSTRUCTION

TRANSFORMER:

KVA:	600
PRIMARY VOLTAGE CLASS:	**1.2 KV**
PRIMARY VOLTAGE:	☐ 600 VOLTS DELTA OR ☐ 480 VOLTS DELTA OR ☐ OTHER _____
PRIMARY TAPS:	2x2.5% FCAN, 2x2.5% FCBN
SECONDARY VOLTAGE:	☐ 240Y/138 VOLTS OR ☐ 208Y/120 VOLTS OR ☐ OTHER _____
PRIMARY B.I.L.:	**10 KV**
SECONDARY BIL:	10 KV
INSULATION CLASS:	220°C
TEMPERATURE RISE:	150°C
IMPEDANCE:	STANDARD
SOUND LEVEL:	STANDARD
WINDING MATERIAL:	☐ COPPER OR ☐ ALUMINUM
TERMINAL MATERIAL:	☐ COPPER OR ☐ ALUMINUM
STANDARD FEATURES:	ANTI–VIBRATION PADS

VECTOR DIAGRAM



PRIMARY



SECONDARY

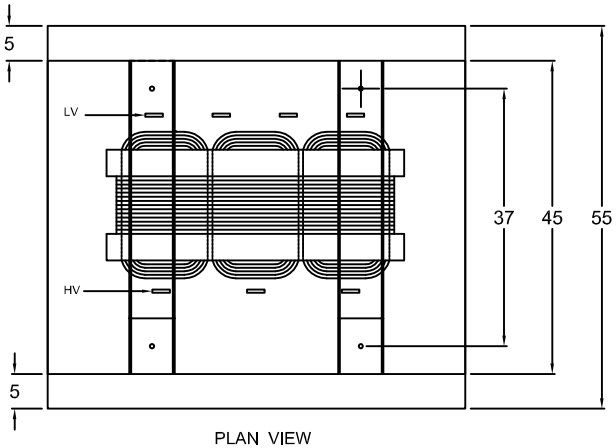

PLAN VIEW
(COVER REMOVED)

ENCLOSURE: CSA TYPE 3R (NEMA 3R)
INDOOR/OUTDOOR USE

APPROX. WEIGHT:

CORE & COIL:	2700 LBS
ENCLOSURE:	700 LBS
TOTAL:	3400 LBS

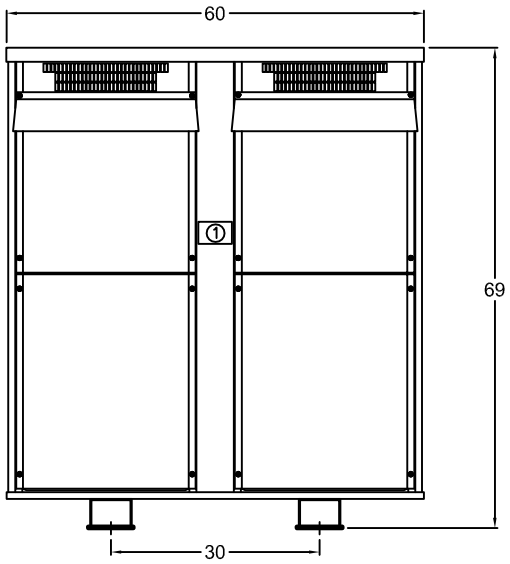

FRONT VIEW

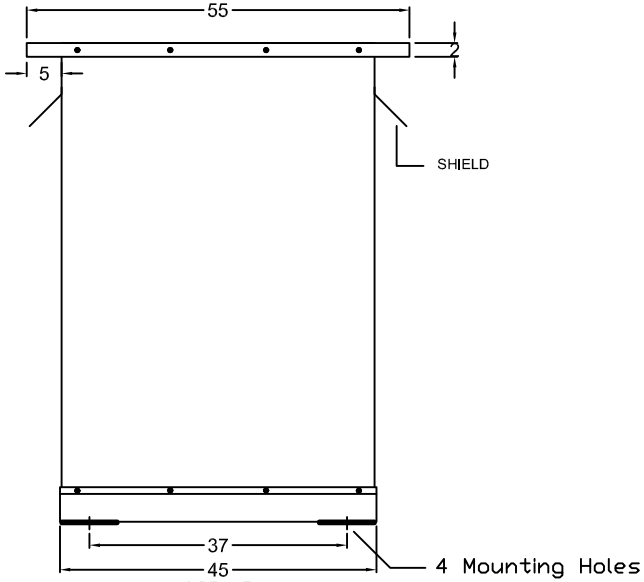

SIDE VIEW

Note: *Dimensions may change if units are co-ordinated with switchgear.*
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.

SCALE: N.T.S.	DRAWN BY: SARKIS	DATE: MAY 11,09	REV.: 0
JOB:	CHECKED BY: DMM	DATE: MAY 11,09	SWO#:

TITLE: 600KVA 1.2KV CLASS ENCLOSURE OUTLINE NEMA 3R

DRAWING No. 600KVA–BIL10–3R