



6 5 4 3 2 1



D

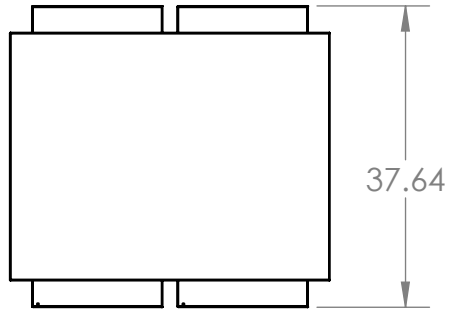

C

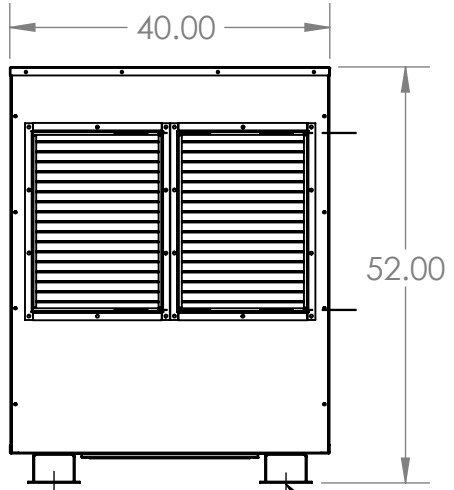

B

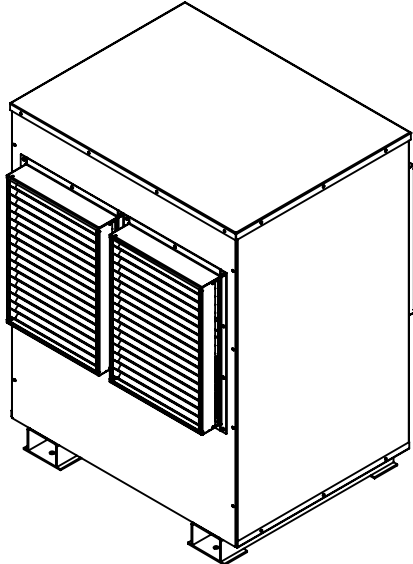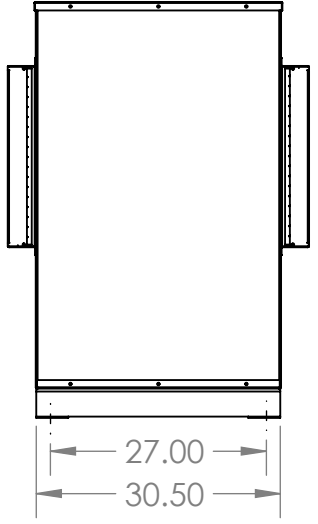

D

C

B

A



A

- CSA Enclosure: E12-9  
 1. Type 12 (NEMA 12)  
 2. Ventilated  
 3. ASA 61 Grey  
 4. Floor mounting  
 5. Weight: 210.26 Lbs

MTG HOLE  
 Ø .63

Note:

1. An air space of not less than 150mm (6 inches) is required between transformer enclosures and between a transformer enclosure and any adjacent surface except floor.
2. Please ensure that aluminum mesh filter is installed behind each chevron panel.
3. Adequate ventilation is essential for the proper cooling of transformer. Those filters should be inspected for dust and cleaned to permit free circulation of air.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES .XX = ± 0.05" .XXX = ± 0.030" .XXXX = ± 0.005" FRACTIONS = ± 1/16" ANGLES = ± 1°  THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF REX POWER MAGNETICS. IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR THE PURPOSE FOR WHICH FURNISHES.	NAME	DATE	TITLE: <b>STANDARD ENCLOSURE                  NEMA 12 #9                  ASSEMBLY</b>		
	DRAWN	WW			6/21/2019
	APPROVED	VS	6/21/2019	SIZE	DWG. NO.
	MATERIAL	STEEL		<b>A</b>	E12-9
FINISH	ASA 61 GREY				
 THIRD-ANGLE PROJECTION			SCALE: NTS	WEIGHT: 210.26 LBS	
			SHEET 1 OF 1	REV <b>1</b>	

6 5 4 3 2 1