



REX POWER MAGNETICS

DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
www.RexPowerMagnetics.com

TRANSFORMER SPECIFICATION

- 3 Phase Auto
- Dry Type
- ANN -Self cooled

Purchaser: TBA
 PO#: TBA
 SWO#: TBA
 Qty: TBA

PRELIMINARY DRAWING ONLY

This drawing may NOT truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

Coils: Copper Wound
 Cat. No.: RC15H-B
 kVA: 15
 Primary: 480 Volts
 Secondary: 208 Volts
 Frequency: 60 Hz
 Insulation Class: 220° C
 Temperature Rise: 150° C
 Impedance: 3.0 - 4.0 %
 Weight: 125 Lbs

Termination	Location	Lug Size
Primary:	Front	Screws
Secondary:	Front	2-14 AWG

Wiring Connection:

Primary:

Voltage 480
 Connect Lines To: H1-H2-H3

Secondary:



Voltage 208
 Connect Loads To: X1-X2-X3

Standards:

1. CSA Certified
- File No. LR34493
2. UL Listed
- File No. E108255

Standard Features:

1. Anti-Vibration pads installed between the enclosure base and the core & coil assembly
2. Ground lug provided

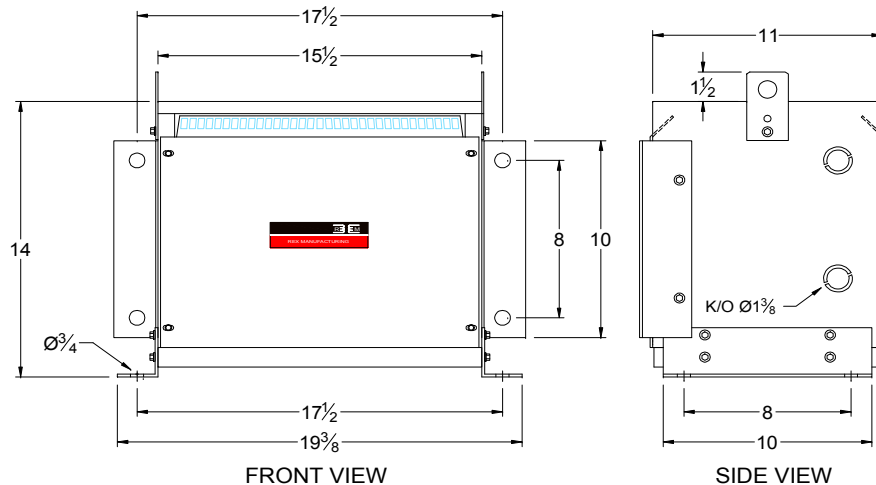

CSA Enclosure:

- Type 1 (NEMA 1)
- Indoor Ventilated
- ASA 61 Grey
- Floor/Wall Mounting

Prepared by: AP
 Approved by: VS
 Date: DEC.4, 2008